

ABB BALDOR RELIANCE III

Customer information packet

VEJMM3558T-5

2HP, 1764RPM, 3PH, 60HZ, 145JM, 3528M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	145JM
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	NEMA PREMIUM NEMA_PREMIUM UR CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	2.150 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	86.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.2 a
Insulation Class	F

Part Detail

Revision	F
Type	AC
Mech. spec.	35M317
Base	
Status	PRD/A
Elec. spec.	35WGG113
Layout	35LYM317
Eff. date	04-30-2024
CD Diagram	CD0006
Poles	04
Leads	3#18 Y
Proprietary	False
Created date	01-10-2022

Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3528M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	15.43 IN
Power Factor	80
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1764 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441L												Q
CAT.NO.	VEJMM3558T-5											
SPEC.	35M317G113G1											
HP	2											
VOLTS	575											
AMP	2.15											
RPM	1765											
FRAME	145JM		HZ		60		PH		3			
SER.F.	1.15	CODE		L	DES	B	CL	F				
NEMA-NOM-EFF	86.5	PF		80								
RATING	40C AMB-CONT											
CC	010A											Q
DE	6206		ODE		6203							
ENCL	TEFC	SN										
VPWM INVERTER READY												
CT6-60H(10:1)VT3-60H(20:1												
SFA 2.56												

AC Induction Motor Performance Data

Record # 81982

Typical performance - not guaranteed values

Winding: 35WGG113-R001				Type: 3528M		Enclosure: TEFC	
Nameplate Data				575 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		2		Full Load Torque		5.95 LB-FT	
Volts		575		Start Configuration		direct on line	
Full Load Amps		2.15		Breakdown Torque		23.7 LB-FT	
R.P.M.		1765		Pull-up Torque		14.43 LB-FT	
Hz		60 Phase		Locked-rotor Torque		17.45 LB-FT	
NEMA Design Code		B KVA Code		Starting Current		19.89 A	
Service Factor (S.F.)		1.15		No-load Current		1.39 A	
NEMA Nom. Eff.		86.5 Power Factor		Line-line Res. @ 25°C		15 Ω	
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		58°C	
S.F. Amps		2.56		Temp. Rise @ S.F. Load		70°C	
				Locked-rotor Power Factor		57	
				Rotor inertia		0.188 lb-ft²	

Load Characteristics 575 V, 60 Hz, 2 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	34	54	68	76	81	84	79
Efficiency	77	84.7	86.6	86.3	85.3	83.7	85.7
Speed	1791	1783	1775	1766	1757	1745	1761
Line amperes	1.45	1.64	1.93	2.29	2.74	3.19	2.56


ABB Motors and Mechanical Inc.


WINDING # 35WGG113

Typical performance - not guaranteed values.




2 HP 3 PH 60 HZ 1765 RPM 575 V 3528M

TORQUES (LB-FT): PO=23.7 PU=14.43 LR=17.45 LRA=19.89

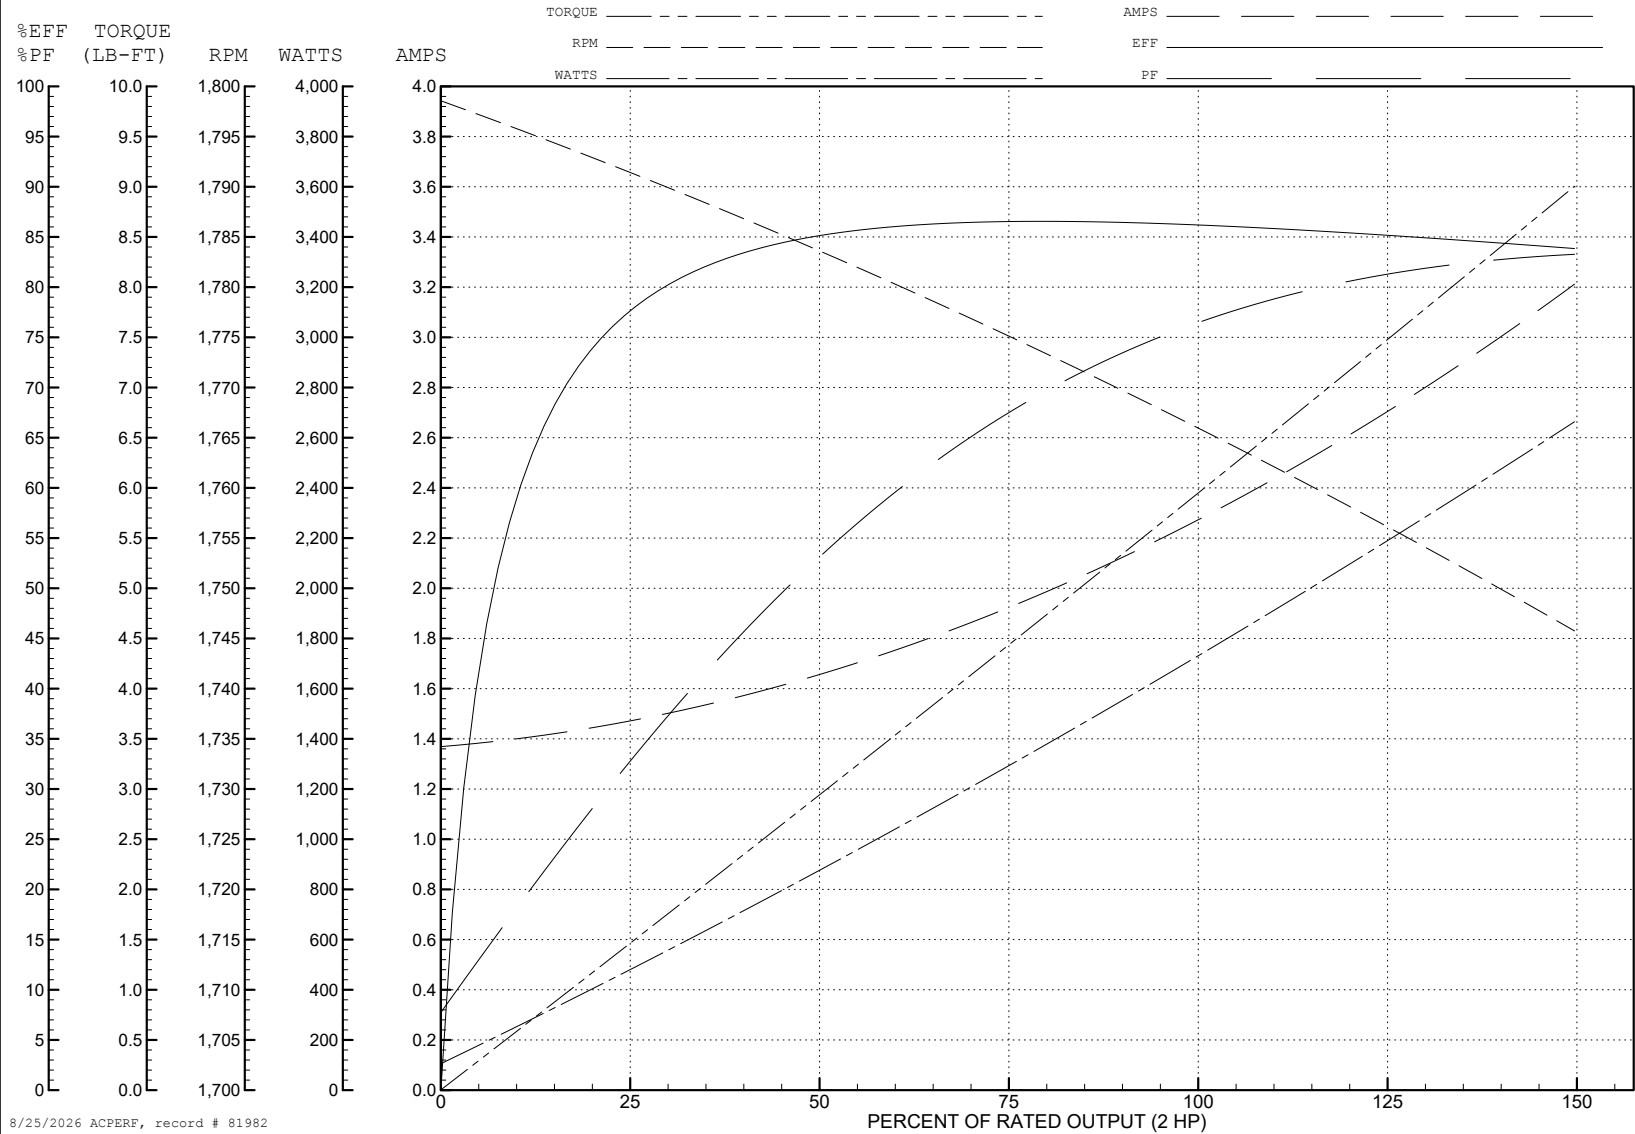

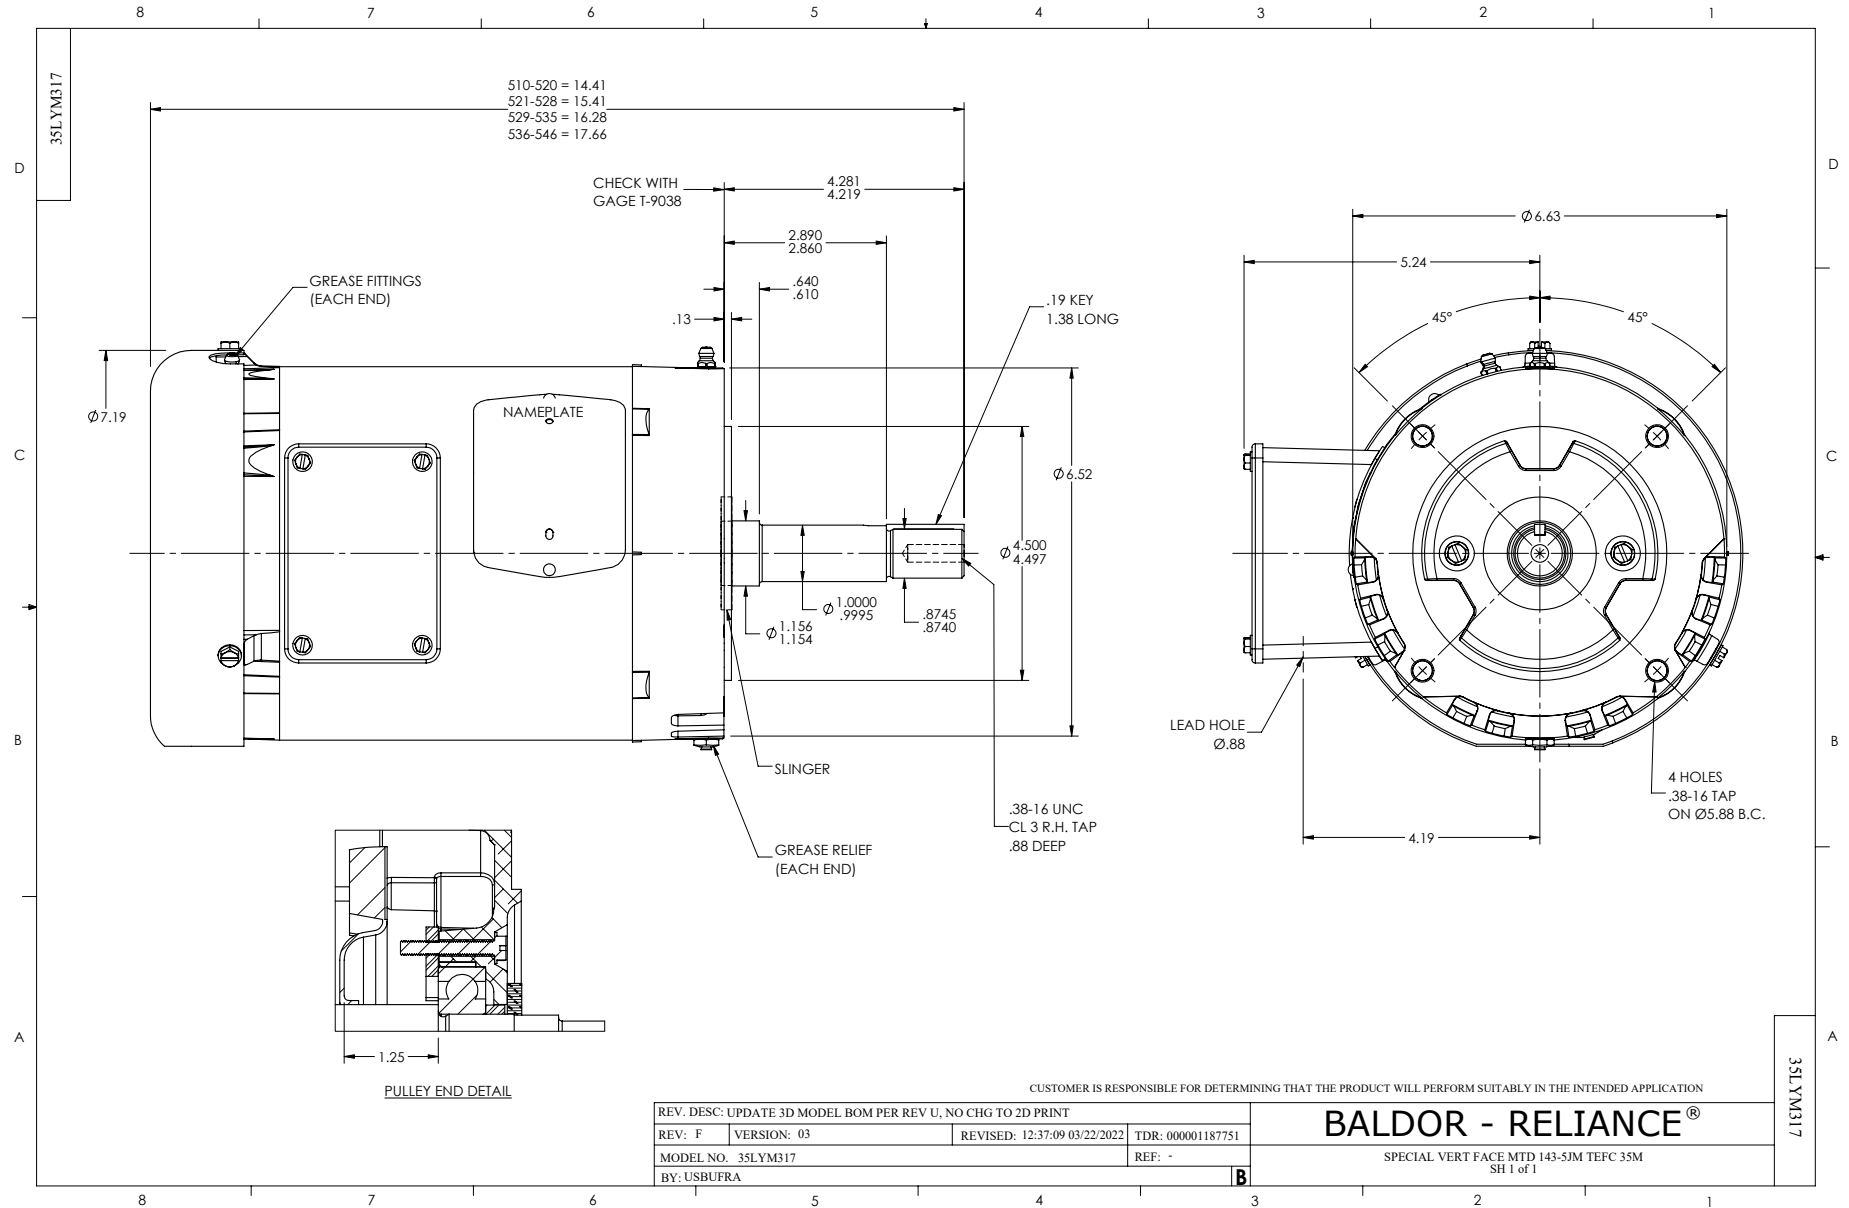

CD0006

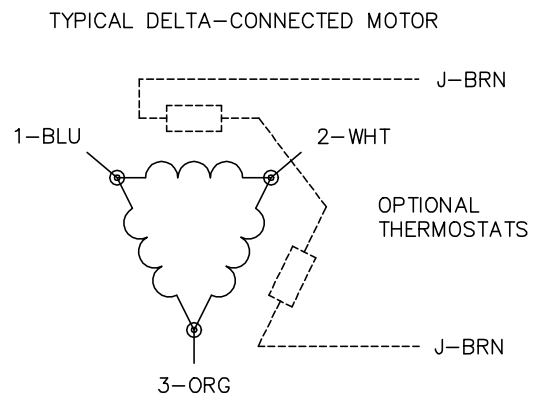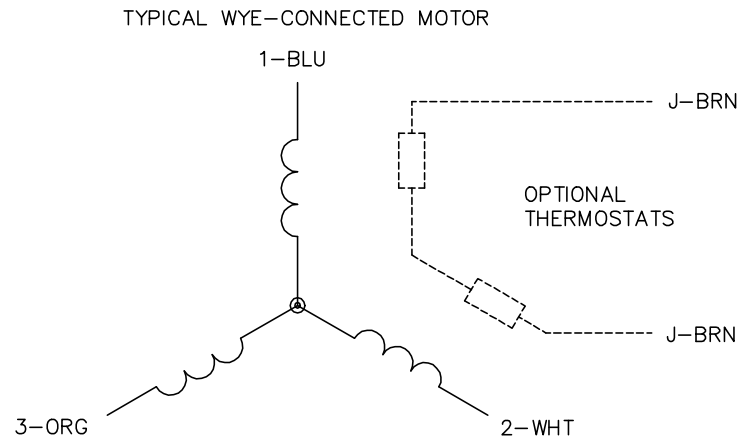

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10: 24: 49 02/19/2019

BY: ENBRIRO

MTL: -



BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1