



---

# Customer information packet

## VFDM3542

.75HP, 1725RPM, 3PH, 60HZ, 56C, 3420M, TEFC, F1

Class - None

Division - Not Applicable

## Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.000 A @ 230.0 V 1.500 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	75.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.5 a
Insulation Class	F

## Part detail

Revision	B
Type	AC
Mech. spec.	34N103
Base	
Status	PRD/A
Elec. spec.	34WGR707
Layout	34LYN103
Eff. date	05-26-2021
CD Diagram	CD0005
Poles	04
Leads	9#18
Proprietary	False
Created date	01-29-2021

Inverter Code	Not Inverter
KVA Code	M
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3420M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.35 IN
Power Factor	64
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

**Nameplate**

<b>NP1279L</b>									
<b>CAT.NO.</b>	VFDM3542								
<b>SPEC.</b>	34N103R707G1								
<b>HP</b>	.75								
<b>VOLTS</b>	230/460								
<b>AMP</b>	3/1.5								
<b>RPM</b>	1725								
<b>FRAME</b>	56C	<b>HZ</b>	60	<b>PH</b>	3				
<b>SER.F.</b>	1.00	<b>CODE</b>	M	<b>DES</b>	B	<b>CL</b>	F		
<b>NEMA-NOM-EFF</b>	75.5	<b>PF</b>	64						
<b>RATING</b>	40C AMB-CONT								
<b>CC</b>								<b>USABLE AT 208V</b>	N/A
<b>DE</b>	6203	<b>ODE</b>	6203						
<b>ENCL</b>	TEFC	<b>SN</b>							

**AC Induction Motor Performance Data**

Record # 86453

Preliminary Data Sheet

<b>Winding:</b> 34WGR707-R004		<b>Type:</b> 3420M		<b>Enclosure:</b> TEFC	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: High Voltage Connection</b>		
<b>Rated Output (HP)</b>	0.75	<b>Full Load Torque</b>	2.27 LB-FT		
<b>Volts</b>	230/460	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	3.0/1.5	<b>Breakdown Torque</b>	9.93 LB-FT		
<b>R.P.M.</b>	1725	<b>Pull-up Torque</b>	7.06 LB-FT		
<b>Hz</b>	60	<b>Phase</b>	3	<b>Locked-rotor Torque</b>	9.17 LB-FT
<b>NEMA Design Code</b>	B	<b>KVA Code</b>	M	<b>Starting Current</b>	9.78 A
<b>Service Factor (S.F.)</b>	1	<b>No-load Current</b>	1.08 A		
<b>NEMA Nom. Eff.</b>	77	<b>Power Factor</b>	61	<b>Line-line Res. @ 25°C</b>	21.8 Ω
<b>Rating - Duty</b>	40C-AMB CONT		<b>Temp. Rise @ Rated Load</b>	69°C	
			<b>Locked-rotor Power Factor</b>	76.9	
			<b>Rotor inertia</b>	0.0476 lb-ft <sup>2</sup>	

**Load Characteristics 460 V, 60 Hz, 0.75 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>
<b>Power Factor</b>	29	44	57	66	73	79
<b>Efficiency</b>	57.5	70.7	75.3	76.7	76.5	75.2
<b>Speed</b>	1780	1763	1745	1726	1723	1700
<b>Line amperes</b>	1.09	1.15	1.26	1.4	1.58	1.79


ABB Motors and Mechanical Inc.


WINDING # 34WGR707

Typical performance - not guaranteed values.

0.75 HP 3 PH 60 HZ 1725 RPM 460 V 3420M

TORQUES (LB-FT): PO=9.93 PU=7.06 LR=9.17 LRA=9.78

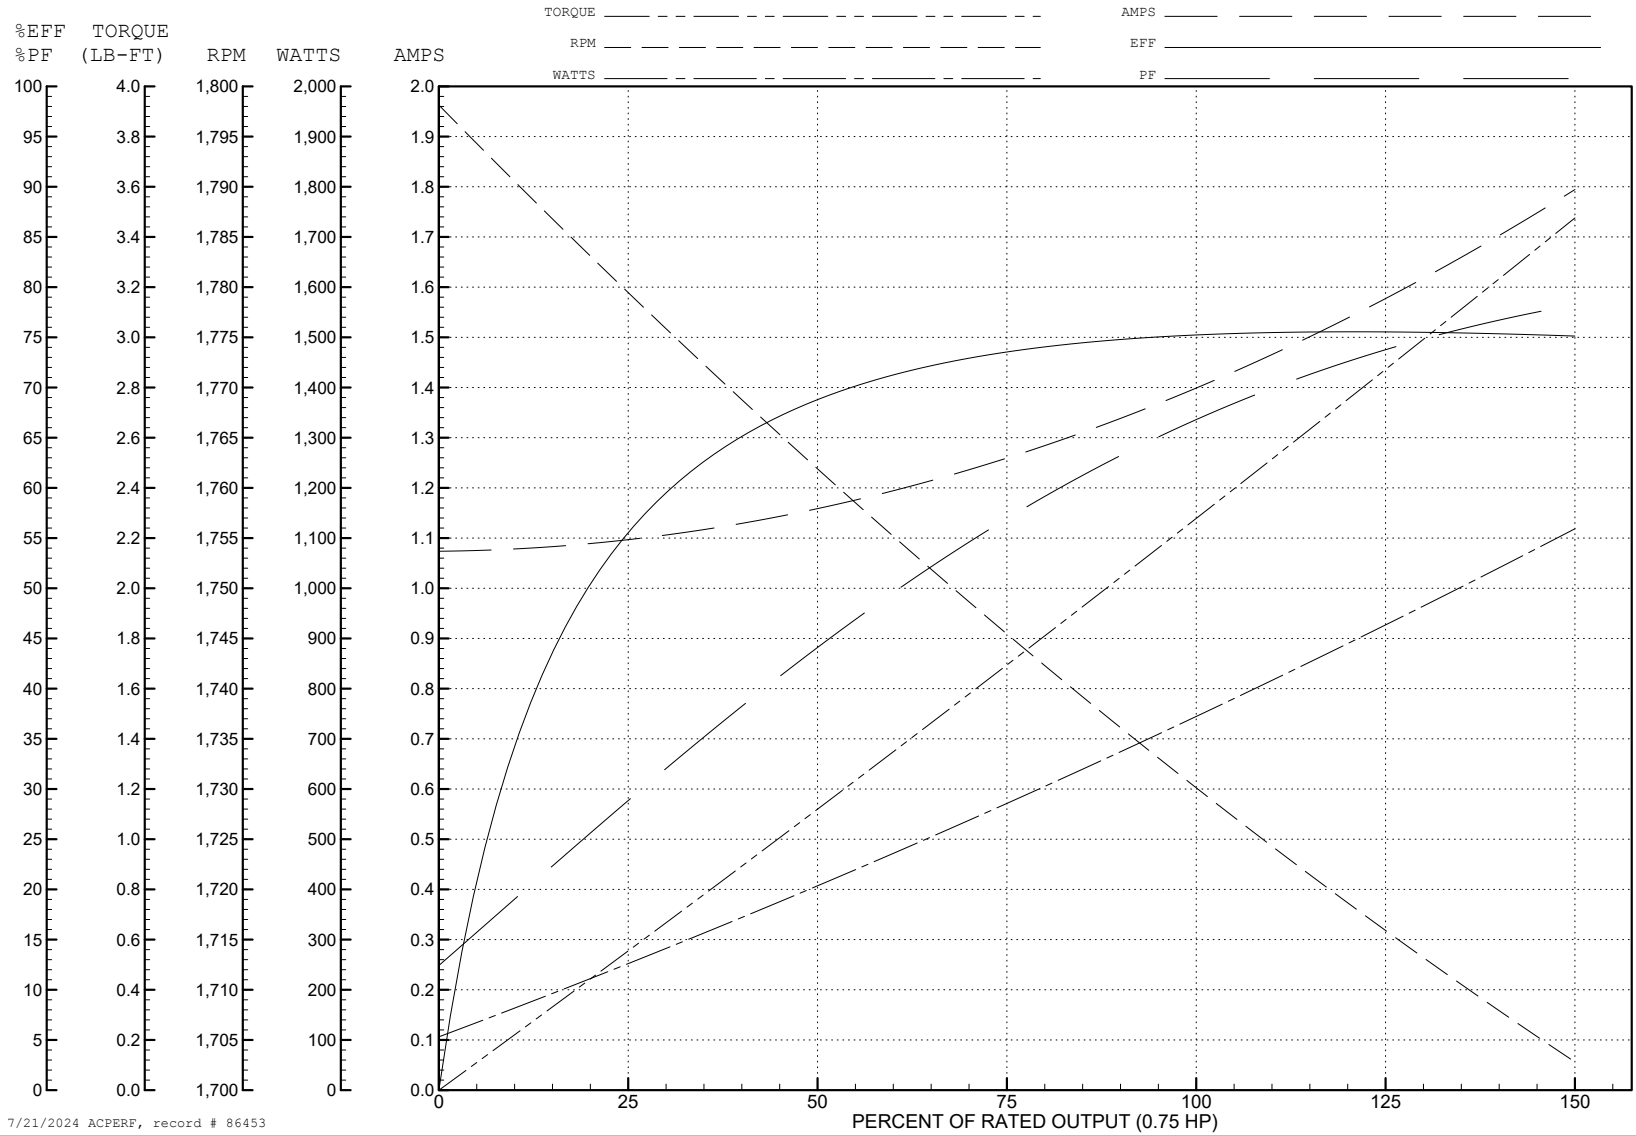


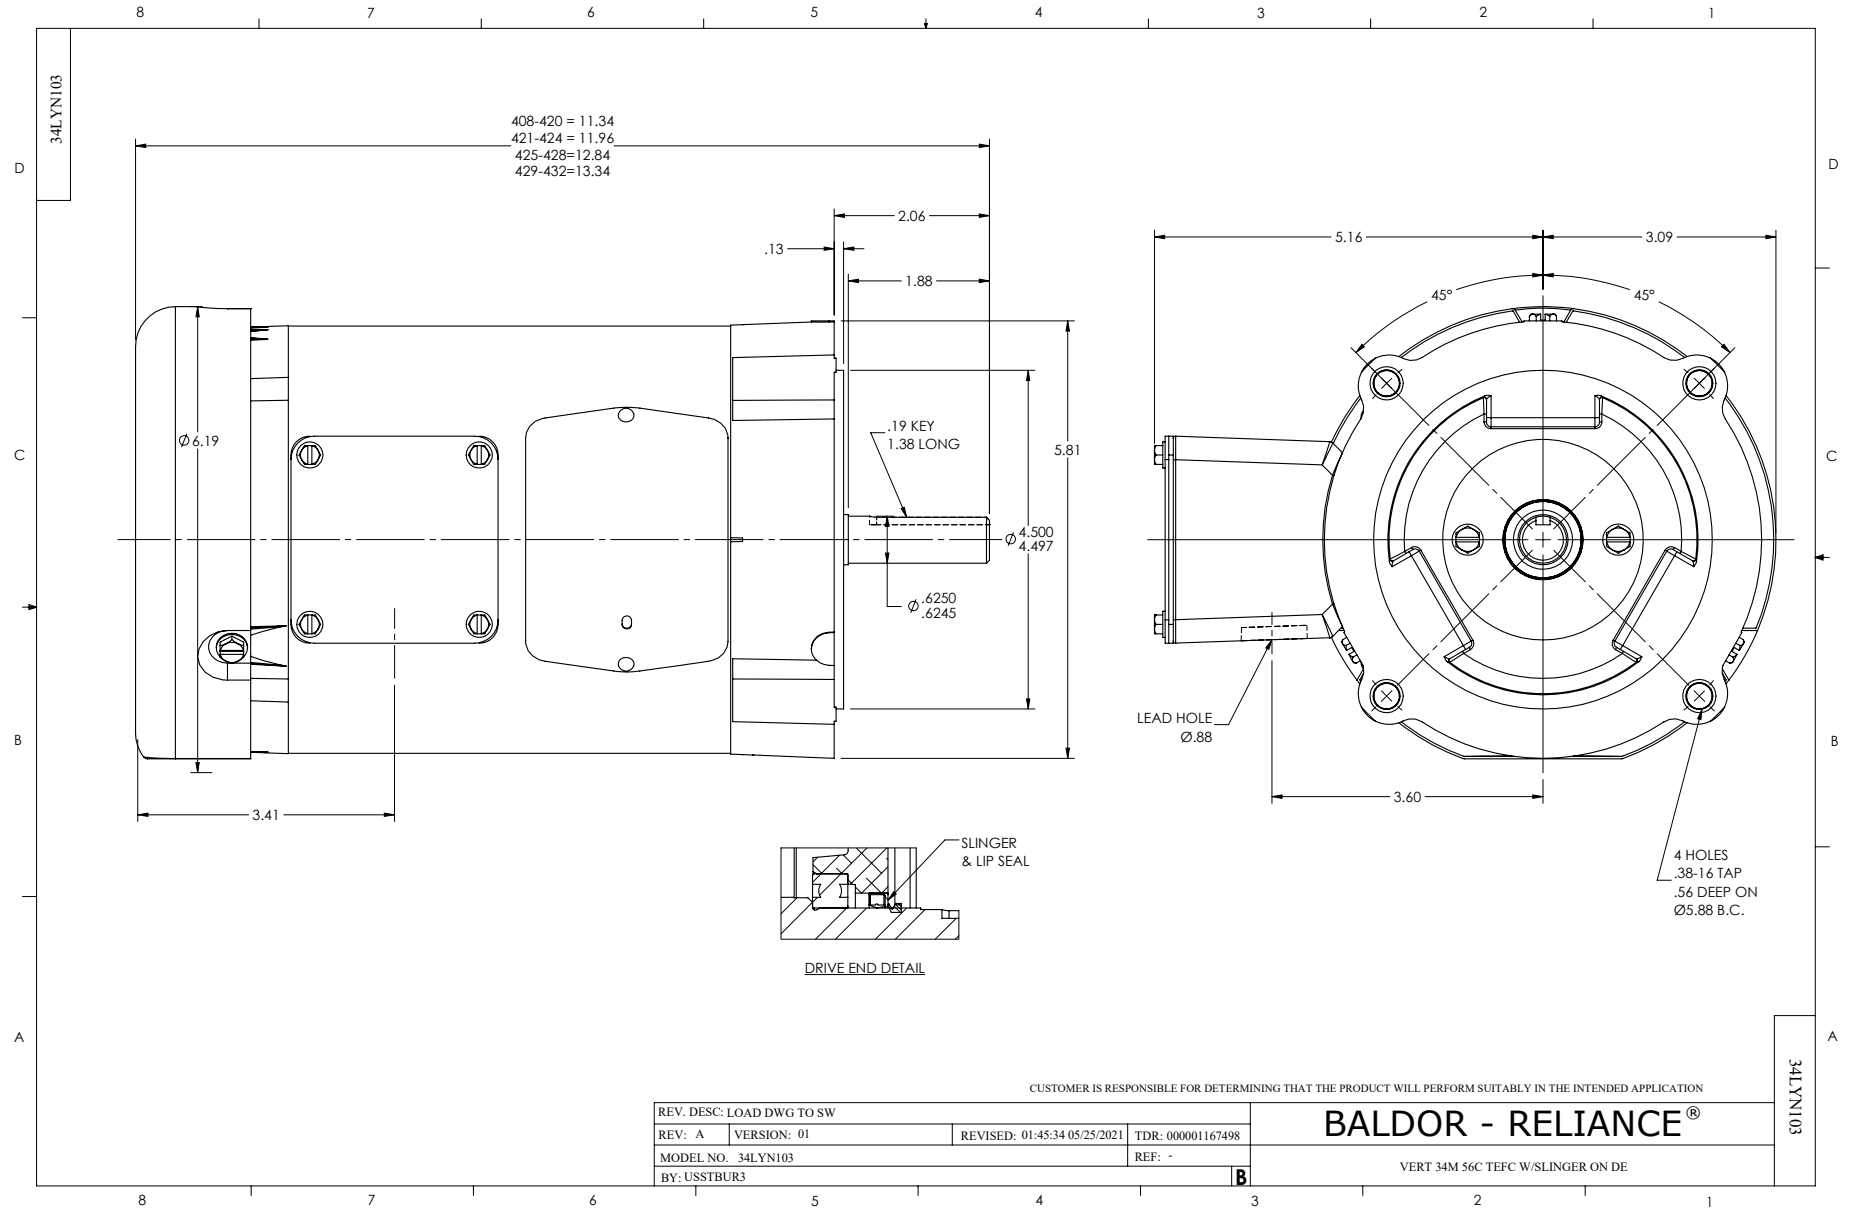

CD0005



LOW VOLTAGE  
(2Y)

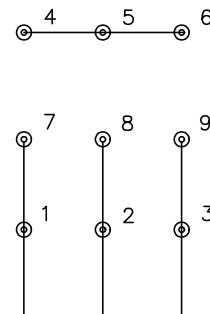

LINE

HIGH VOLTAGE  
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

3PH, DV, 9 LEADS