

ABB BALDOR RELIANCE III

Customer information packet

XM36462T

40HP, 1190RPM, 3PH, 60HZ, 364T, TEFC, F1

Class - CLI GP D; CLII GP F,G

Division - Division I

Specifications

Enclosure	TEFC
Frame	364T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP D; CL II GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	40.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV CSA UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	6-60
Current @ Voltage	49.800 A @ 460.0 V 99.600 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.1 %
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	49.8 a
Insulation Class	F
Inverter Code	Inverter Ready

Part Detail

Revision	-
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG1194
Layout	611742-987
Eff. date	02-26-2020
CD Diagram	416820-002
Poles	06
Leads	3#4,6#6
Proprietary	False
Created date	11-15-2019

IP Rating	NONE
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Max Speed	3000 rpm
Motor Lead Quantity/Wire Size	3 @ 4 AWG
Motor Standards	NEMA
Motor Type	A36062M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	33.48 IN
Power Factor	80
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.00
Shaft Diameter	2.374 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1190 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Nameplate

NP2496L	
MOBIL POLYREX EM	

000613006PC		
CLASS I GROUP	D X X	NO.
CLASS II GROUP	F G X	
OPERATING TEMP CODE	T3C	

NP4017L

SPEC NO.	A36-7824-1194			CAT.NO.	XM36462T					FRAME SIZE	364T
HP	40	VOLTS	230/460	PHASE	3	DESIGN	B	TYPE	P		
RPM	1190	AMPS	99.6/49.8	HZ	60	AMB	40	SF	1.00		
DRIVE END BEARING	65BC03J30X		DUTY	CONT	INSUL CLASS		F				
OPP D.E. BEARING	65BC03J30X		ENCL	TEFC	CODE	G					
SINE WAVE SF	1.15	WK2	19.1	MAG CUR	18.5	MAX RPM	3000				
CT HZ	6-60	VT HZ	0-60	CHP HZ	60-90	NOM.EFF.	94.1				
	IP54										
SER.NO.				MOTOR WEIGHT							

ABB BALDOR RELIANCE III S/O		CUSTOMER INFORMATION PACKET		XM36462T - 40HP, 1190RPM, 3PH, 60HZ, 364T, TEFC, F1		
	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	364T	40	P	3/60	1190	230/460
AMPS	DUTY	AMB °C/ INSUL	S.F.	NEMA DESIGN	CODE LETTER	ENCLOSURE
99.6/49.8	CONT	40/F	1.00	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
491378	418141088JE	---	---	.0373/.149		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	18.5	1200	5.70	0	
1/4	10.0	22.4	1197	47.0	89.2	
2/4	20.0	29.6	1194	67.8	93.2	
3/4	30.0	39.1	1191	76.3	94.1	
4/4	40.0	49.8	1188	79.9	94.1	
5/4	50.0	61.2	1184	81.6	93.7	
SPEED TORQUE						
		RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES	
LOCKED ROTOR		0	165	291	300	
PULL UP		480	142	251	274	
BREAKDOWN		1134	251	444	172	
FULL LOAD		1188	100	177	49.8	
AMPERES SHOWN FOR 460 VOLT CONNECTION. IF OTHER CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.						
TYPICAL DATA XE MOTOR-NEMA NOM. EFF. 94.1 % GUARANTEED MIN. EFF. 93.0%						
		DRAWN BY: <u>T.G. KELATI</u> CHECKED BY: <u>D. H. MAY</u> APPROVED BY: <u>E.J. CHRISTIAN</u> DATE: <u>10/12/06</u>		AC MOTOR PERFORMANCE DATA		A36WG1194-R015 DATE ISSUED 01/24/25

FRAME 364T

HP 40

TYPE	P
1	0.0000
2	0.0000
3	0.0000
4	0.0000
5	0.0000
6	0.0000
7	0.0000
8	0.0000
9	0.0000
10	0.0000
11	0.0000
12	0.0000
13	0.0000
14	0.0000
15	0.0000
16	0.0000
17	0.0000
18	0.0000
19	0.0000
20	0.0000
21	0.0000
22	0.0000
23	0.0000
24	0.0000
25	0.0000
26	0.0000
27	0.0000
28	0.0000
29	0.0000
30	0.0000
31	0.0000
32	0.0000
33	0.0000
34	0.0000
35	0.0000
36	0.0000
37	0.0000
38	0.0000
39	0.0000
40	0.0000
41	0.0000
42	0.0000
43	0.0000
44	0.0000
45	0.0000
46	0.0000
47	0.0000
48	0.0000
49	0.0000
50	0.0000
51	0.0000
52	0.0000
53	0.0000
54	0.0000
55	0.0000
56	0.0000
57	0.0000
58	0.0000
59	0.0000
60	0.0000
61	0.0000
62	0.0000
63	0.0000
64	0.0000
65	0.0000
66	0.0000
67	0.0000
68	0.0000
69	0.0000
70	0.0000
71	0.0000
72	0.0000
73	0.0000
74	0.0000
75	0.0000
76	0.0000
77	0.0000
78	0.0000
79	0.0000
80	0.0000
81	0.0000
82	0.0000
83	0.0000
84	0.0000
85	0.0000
86	0.0000
87	0.0000
88	0.0000
89	0.0000
90	0.0000
91	0.0000
92	0.0000
93	0.0000
94	0.0000
95	0.0000
96	0.0000
97	0.0000
98	0.0000
99	0.0000
100	0.0000

PHASE / HERTZ 3/60

CUSTOMER INFORMATION PACKET

R INFORMATIO

VOLTS 230/460

AMPS 99.6/49.8

DUTY CONT

AMB °C / INSUL 40/F

XM36462T - 40HP, 1190RPM, 3PH, 60HZ, 364T, TEEC, F1

S.F. 1.00,

NEMA DESIGN B

CODE LETTER G

ENCLOSURE TEFC

E/S 491378



Z, 364T, TFCG, F1
ROTOR 418141088.JE

TEST S.O. TYPICAL DATA

TEST DATE --

STATOR RES. @ 25°C .0373/.149

OHMS (BETWEEN LINES)

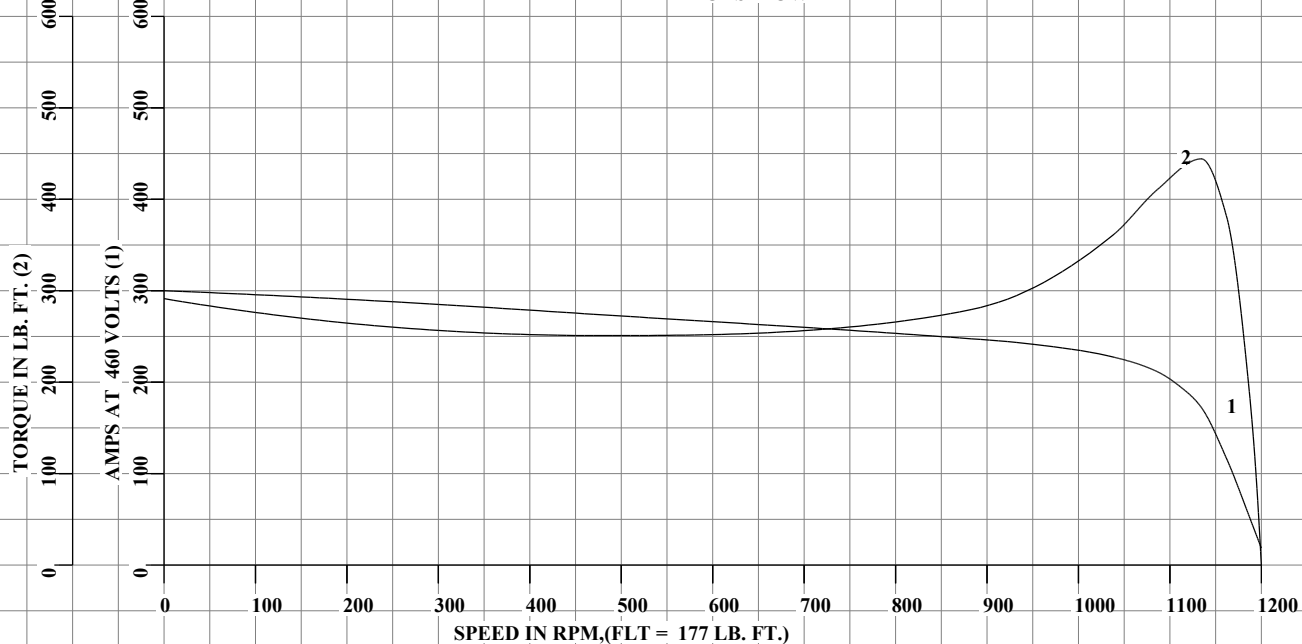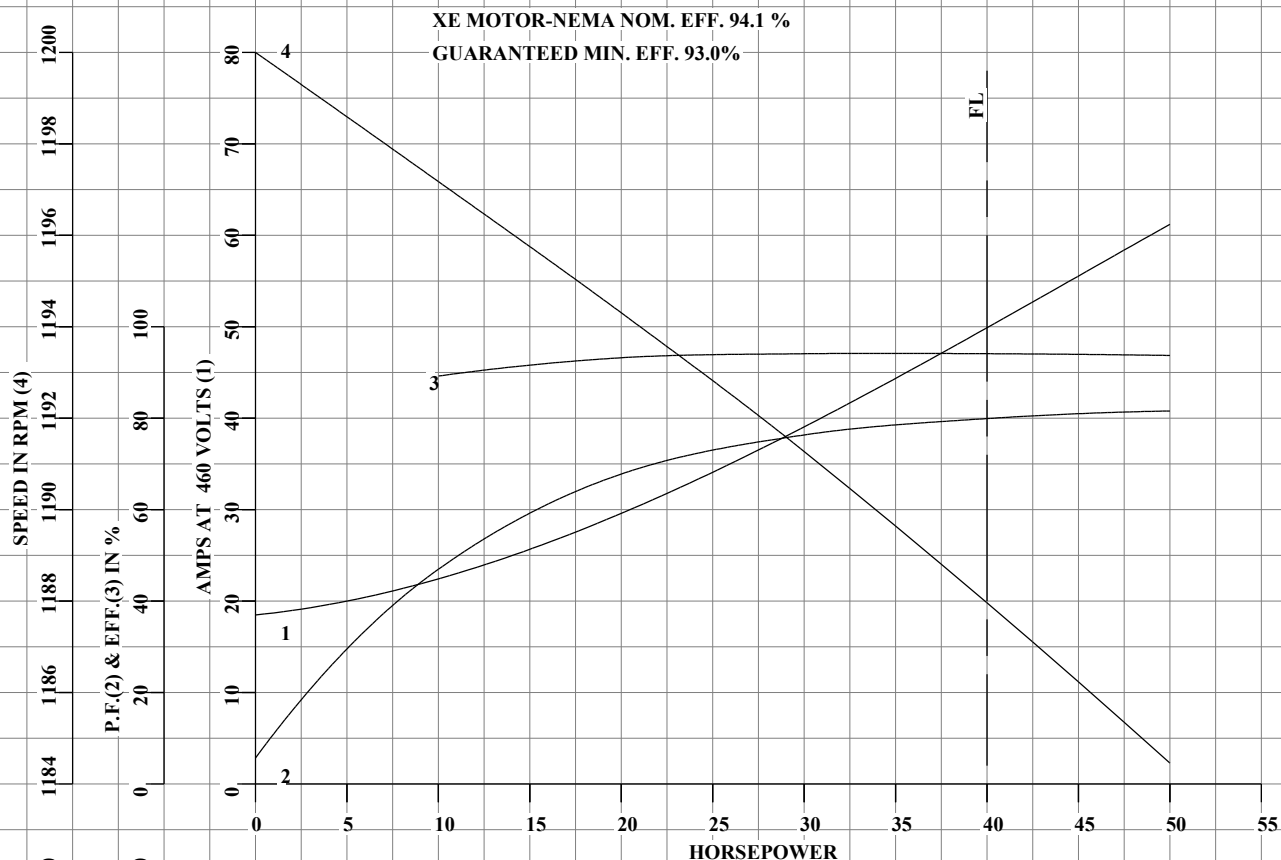

AMPERES SHOWN FOR 230/460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.



DRAWN BY: T.G. KELATI
CHECKED BY: D. H. MAY
APPROVED BY: E.J.CHRISTIAN
DATE: 10/12/06

AC MOTOR PERFORMANCE DATA

A36WG1194-R015

ISSUE DATE 01/24/25

FRAME 364T

VOLTS 230/460

NEMA DESIGN B

TEST S.O. TYPICAL DATA

HP 40

AMPS 99.6/49.8

CODE LETTER G

TEST DATE ---

TYPE P

DUTY CONT

ENCLOSURE TEFC


STATOR RES. @ 25°C .0373/.149

PHASE / HERTZ 3/60

AMB °C / INSUL 40/F

E/S 491378

OHMS (BETWEEN LINES)

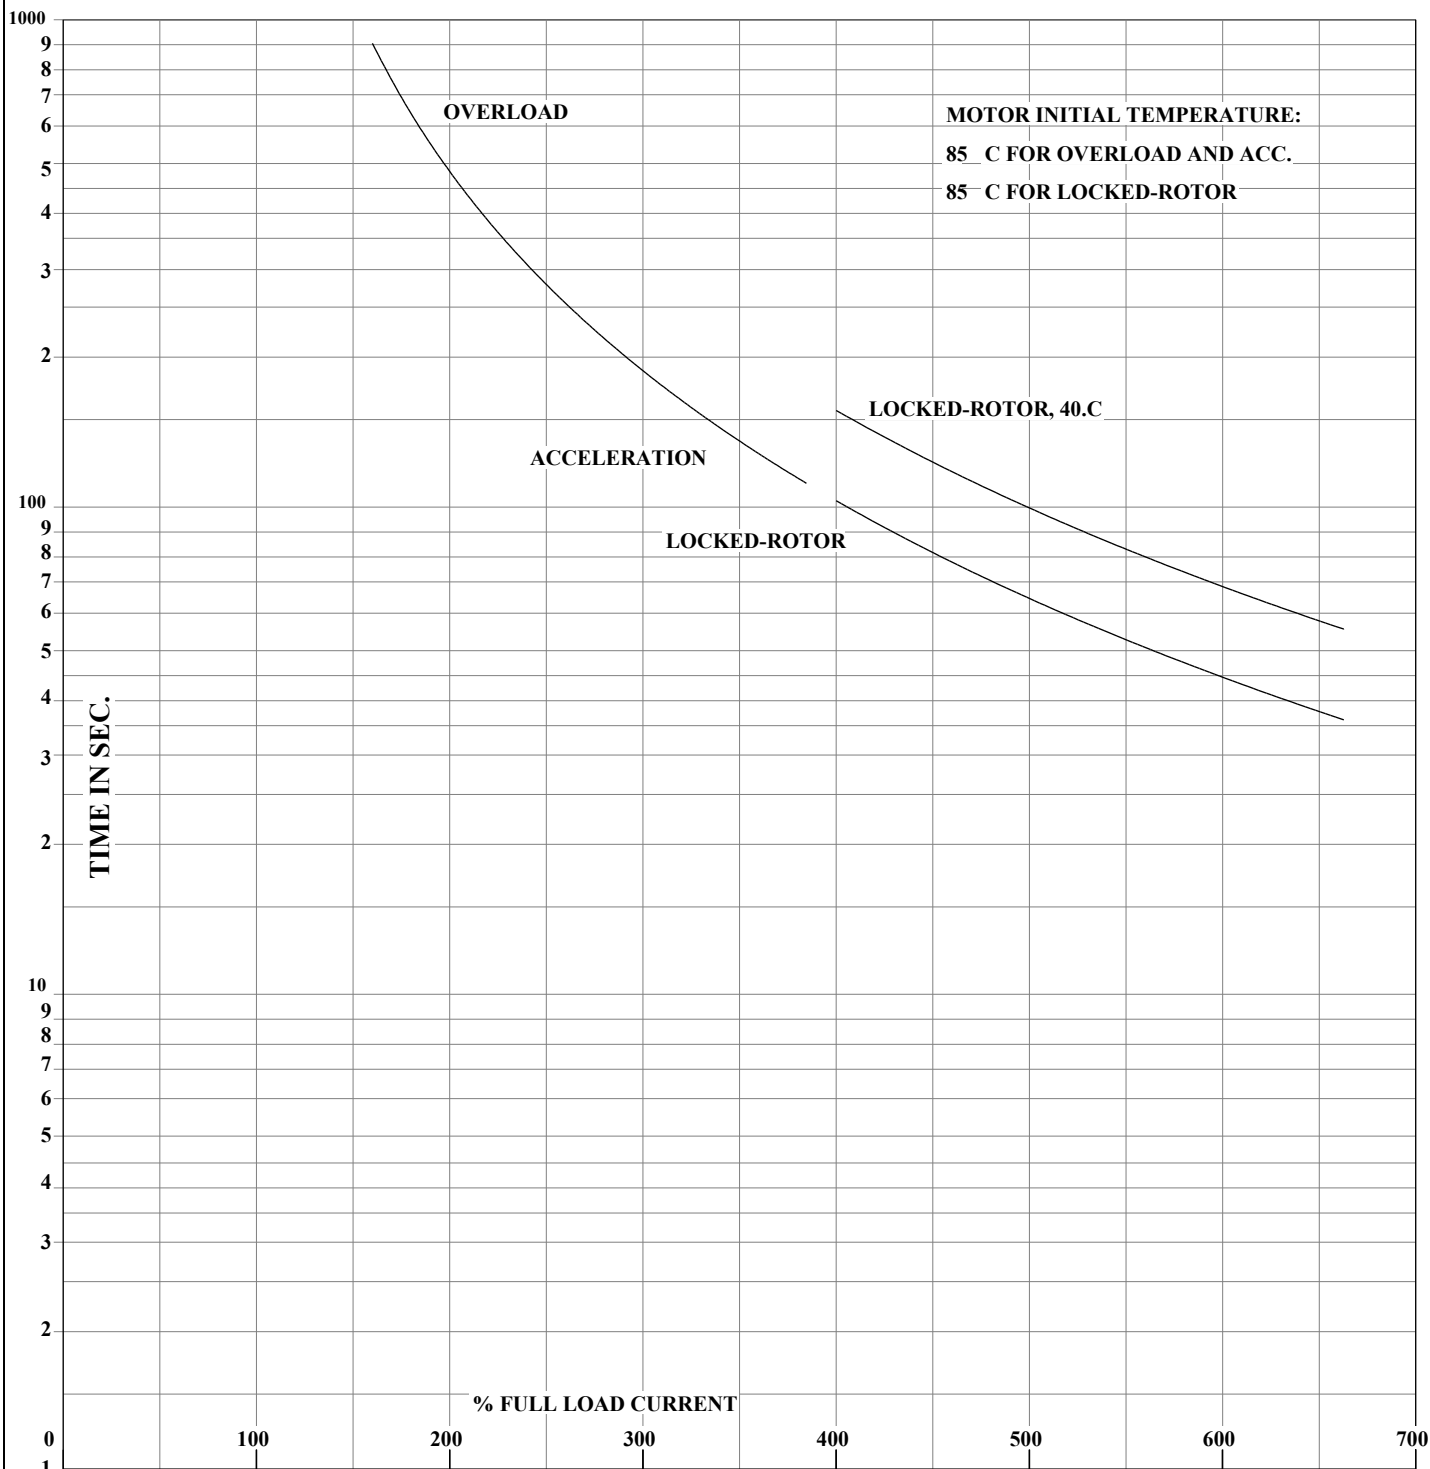

THERMAL LIMIT CURVE
XE MOTOR-NEMA NOM. EFF. 94.1 %

AMPERES SHOWN FOR 230/460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.




DRAWN BY: T.G. KELATI
CHECKED BY: D. H. MAY
APPROVED BY: E.J. CHRISTIAN
DATE: 10/12/06

AC MOTOR
PERFORMANCE
DATA

A36WG1194-R015

ISSUE DATE 01/24/25



CONNECTION DIAGRAM
ACCESSORIES

MOTOR WINDING THERMOSTATS		
CONTACTS	_____ @ _____ ° C	
FIGURE NUMBER	_____	
CONTACT RATING		
VOLTS	CONTINUOUS AMPERES	INRUSH AMPERES
110-120	3. 0	30
220-240	1. 5	15
440-480	0. 75	7. 5
550-600	0. 60	6. 0

THERMOSTATS	
NORMALLY CLOSED	NORMALLY OPEN
FIGURE 1	FIGURE 4
FIGURE 2	FIGURE 5
FIGURE 3	FIGURE 6
FIGURE 7	FIGURE 8

CUSTOMER _____ CUSTOMER ORDER NO. _____ S.O. NO. _____

REV. DESC: LOADED TO BUS		
REV. LTR: A	VERSION: 01	TDR: 000000570390
FILE: \RAG\00013\849	REVISED: 10:16:21 12/07/2010	BY: RAGDRF
MTL: -		

BALDOR

A-C MOTOR CONNECTION ACCESSORIES



SH 1 of 1

418174-006

418174-006

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED

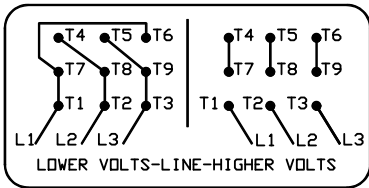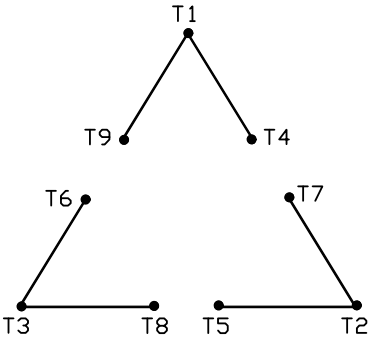

(N. P. 1575-B)

416820-002

REV. DESC: ADJUST TEXT DARKNESS		
REV. LTR: B	VERSION: 02	TDR: 000001285318
FILE: \RAG\00022\453	REVISED: 09:36:26 09/24/2026	BY: USJOSUL
MTL: -		



CONN DIAG - STANDARD 9 LEAD, DELTA-CONNECTED

SH1 of 1