

# **ABB BALDOR RELIANCE III**

---

## **Customer information packet**

### ZDM3665T-5

5HP, 1750RPM, 3PH, 60HZ, 184TC, 0640M, TEBC, F1

Class - None

Division - Not Applicable

**Specifications**

<b>Enclosure</b>	TEBC
<b>Frame</b>	184TC
<b>Frame Material</b>	Iron
<b>Frequency</b>	60.00 Hz
<b>Haz Area Class and Group</b>	None
<b>Haz Area Division</b>	Not Applicable
<b>Motor Letter Type</b>	Three Phase
<b>Output @ Frequency</b>	5.000 HP @ 60 HZ
<b>Phase</b>	3
<b>Synchronous Speed @ Frequency</b>	1800 RPM @ 60 HZ
<b>Voltage @ Frequency</b>	575.0 V @ 60 HZ
<b>Agency Approvals</b>	UR CSA
<b>Ambient Temperature</b>	40 °C
<b>Auxiliary Box</b>	NO AUXILLARY BOX
<b>Auxiliary Box Lead Termination</b>	None
<b>Base Indicator</b>	Rigid
<b>Bearing Grease Type</b>	Polyrex EM (-20F +300F)
<b>Blower</b>	115V 1-Phase EXT
<b>Current @ Voltage</b>	5.200 A @ 575.0 V
<b>Design Code</b>	B
<b>Drip Cover</b>	No Drip Cover
<b>Duty Rating</b>	CONT
<b>Efficiency @ 100% Load</b>	90.2 %
<b>Electrically Isolated Bearing</b>	Not Electrically Isolated
<b>Feedback Device</b>	ENCODER
<b>Front Face Code</b>	Encoder/Feedback Device
<b>Front Shaft Indicator</b>	None
<b>Heater Indicator</b>	No Heater
<b>High Voltage Full Load Amps</b>	5.2 a
<b>Insulation Class</b>	H
<b>Inverter Code</b>	Inverter Duty

**Part Detail**

<b>Revision</b>	AC
<b>Type</b>	AC
<b>Mech. spec.</b>	06F552
<b>Base</b>	
<b>Status</b>	PRD/A
<b>Elec. spec.</b>	06WGW357
<b>Layout</b>	06LYF552
<b>Eff. date</b>	09-30-2025
<b>CD Diagram</b>	CD0006
<b>Poles</b>	04
<b>Leads</b>	3#16
<b>Proprietary</b>	False
<b>Created date</b>	01-01-0001

<b>KVA Code</b>	J
<b>Lifting Lugs</b>	Standard Lifting Lugs
<b>Locked Bearing Indicator</b>	Locked Bearing
<b>Max Speed</b>	6000 rpm
<b>Motor Lead Exit</b>	Ko Box
<b>Motor Lead Quantity/Wire Size</b>	3 @ 16 AWG
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	0640M
<b>Mounting Arrangement</b>	F1
<b>Number of Poles</b>	4
<b>Overall Length</b>	21.71 IN
<b>Power Factor</b>	80
<b>Product Family</b>	General Purpose
<b>Pulley End Bearing Type</b>	Ball
<b>Pulley Face Code</b>	C-Face
<b>Pulley Shaft Indicator</b>	Standard
<b>Rodent Screen</b>	None
<b>Service Factor</b>	1.00
<b>Shaft Diameter</b>	1.125 IN
<b>Shaft Extension Location</b>	Pulley End
<b>Shaft Ground Indicator</b>	No Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Shaft Slinger Indicator</b>	No Slinger
<b>Speed</b>	1750 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	Normally Closed Thermostat
<b>Vibration Sensor Indicator</b>	No Vibration Sensor
<b>Winding Thermal 1</b>	None
<b>Winding Thermal 2</b>	None

**Nameplate**

<b>NP4539L</b>									
<b>CAT.NO.</b>	ZDM3665T-5								
<b>SPEC.</b>	06F552W357Z1								
<b>FRAME</b>	184TC	<b>H.P.</b>	5 TE						
<b>VOLTS</b>	575								
<b>MAG. CUR.</b>	2.7	<b>F.L. AMPS</b>	5.2						
<b>R.P.M.</b>	1750	<b>R.P.M. MAX</b>	6000						
<b>HZ.</b>	60	<b>PH.</b>	3	<b>CLASS</b>	H				
<b>SER.F.</b>	1.00	<b>DES.</b>	B	<b>SL HZ</b>	1.7				
<b>NEMA NOM. EFF.</b>	90.2	<b>WK2</b>	0.37						
<b>BLWR V</b>	115	<b>PH</b>	1	<b>HZ</b>	60	<b>AMPS</b>	.26		
<b>RATING</b>	40C AMB-CONT								
<b>DE</b>	6206	<b>ODE</b>	6205						
<b>CC</b>	010A	<b>SN</b>							
	1000:1 CT/VT								



**AC Induction Motor Performance Data**  
 Record # 20660  
 Typical performance - not guaranteed values

<b>Winding:</b> 06WGW357	<b>Type:</b> 0640M	<b>Enclosure:</b> TEBC
--------------------------	--------------------	------------------------

Nameplate Data				General Characteristics at 575 V, 60 Hz: Single Volt Motor	
Rated Output (HP)	5			Full Load Torque	15 LB-FT
Volts	575			Start Configuration	DOL
Full Load Amps	5.2			Break Down Torque	50 LB-FT
R.P.M.	1750			Pull-Up Torque	30 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	32 LB-FT
NEMA Design Code	B	KVA Code	J	Starting Current	38 Amps
Service Factor	1.00			No-load Current	2.7 Amps
NEMA Nom. Eff.	90.2	P.F.	80	Line-line Res. @ 25°C.	3.86 Ohms
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	47°C
S.F. Amps				Temp. Rise @ S.F. Load	


Load Characteristics at 575 Volts, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	39	61	75	82	86	88	
Efficiency	84.1	89.4	90.4	90.2	89.4	88.3	
Speed	1789	1778	1767	1755	1742	1729	
Line Amperes	2.9	3.4	4.2	5.1	5.8	7.2	


Baldor Electric Company Fort Smith, Arkansas




Catalog	ZDM3665T-5	NP VOLTS	575	ENCLOSURE	TEBC	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)			
FRAME	184TC	NP AMPS	5.2	Base Volts	575	R1	1.890	X1	4.353
HP	5 HP	DUTY	Cont	Base AMPS	5.1	R2	1.530	X2	3.402
BASE SPEED	1800	MAX SAFE RPM	6000	Slip Hz	1.50			XM	122.943
PHASE/HZ	3/60	AMB <sup>0</sup> C/INSUL	40/H	WK <sup>2</sup> (lb-ft <sup>2</sup> )	0.372				

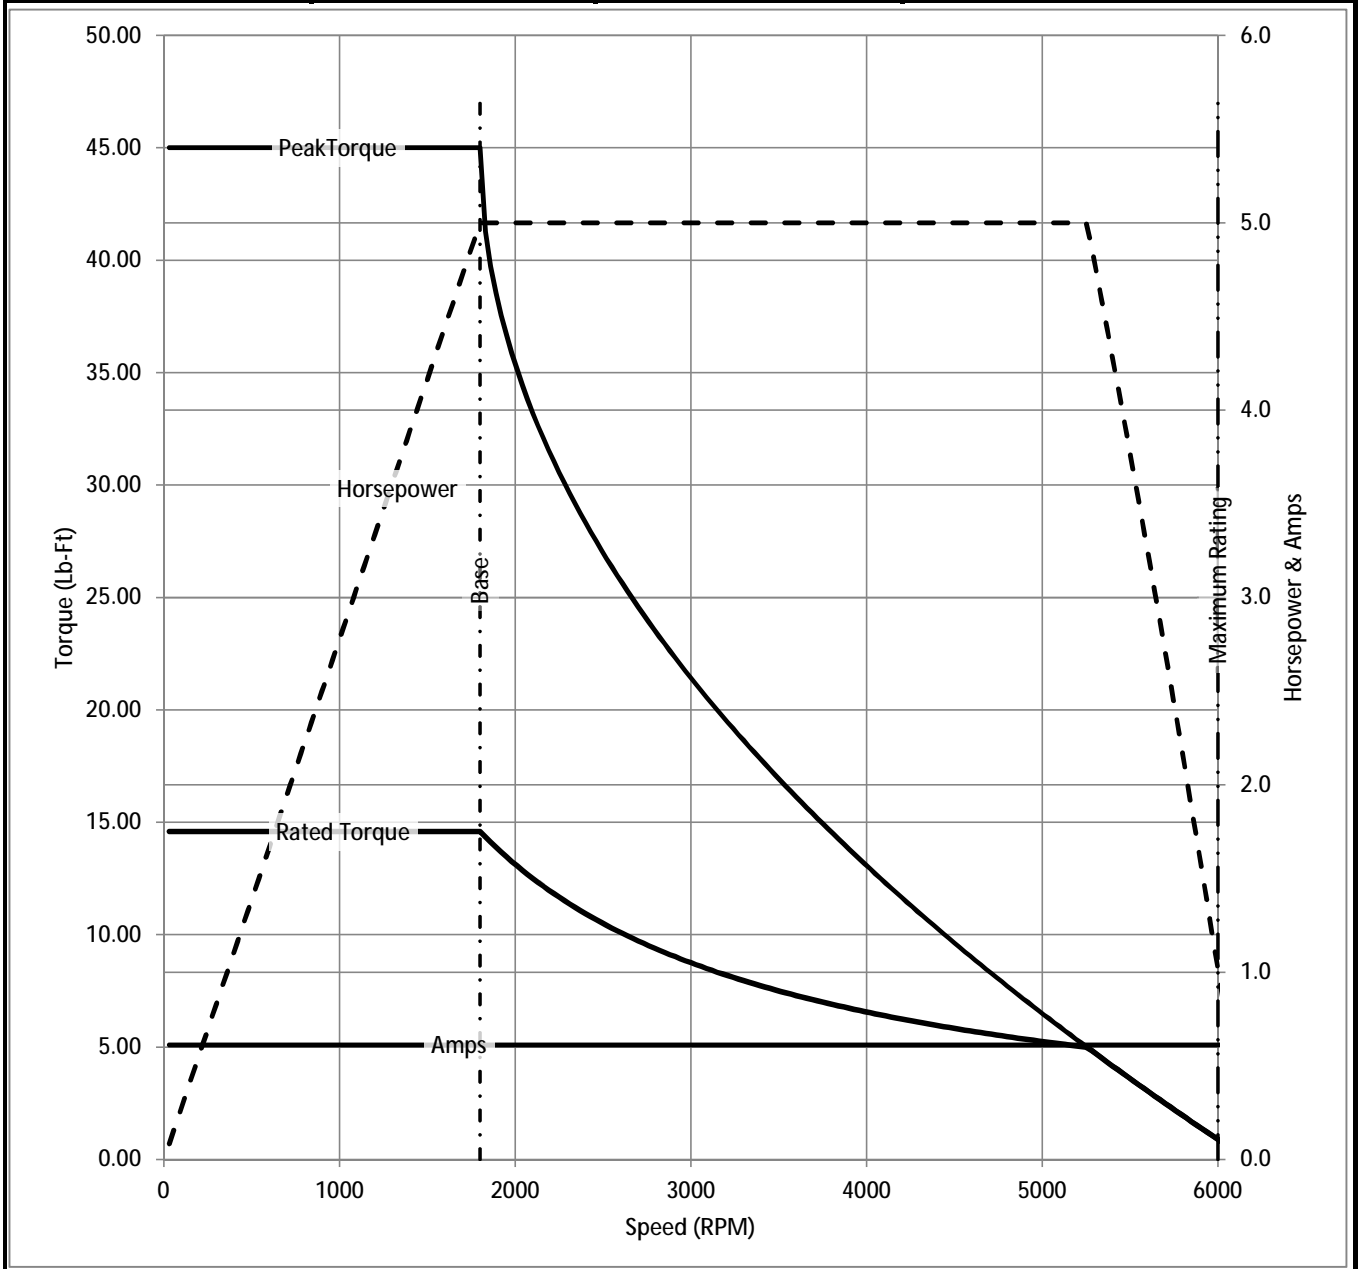


Remarks: Calculated Data

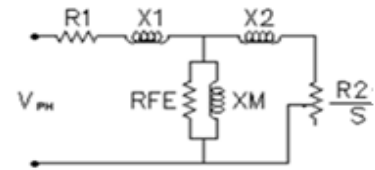

<p><b>BALDOR</b> A MEMBER OF THE ABB GROUP</p>	DR BY	<u>ENR</u>	<p><b>A-C MOTOR</b> PERFORMANCE CURVES</p> <p><b>06F552W357Z1</b></p>	
	CK BY			
	APP BY	<u>ENR</u>		
	DATE	<u>2/26/2013</u>		
			ISSUE DATE	<u>2/26/2013</u>

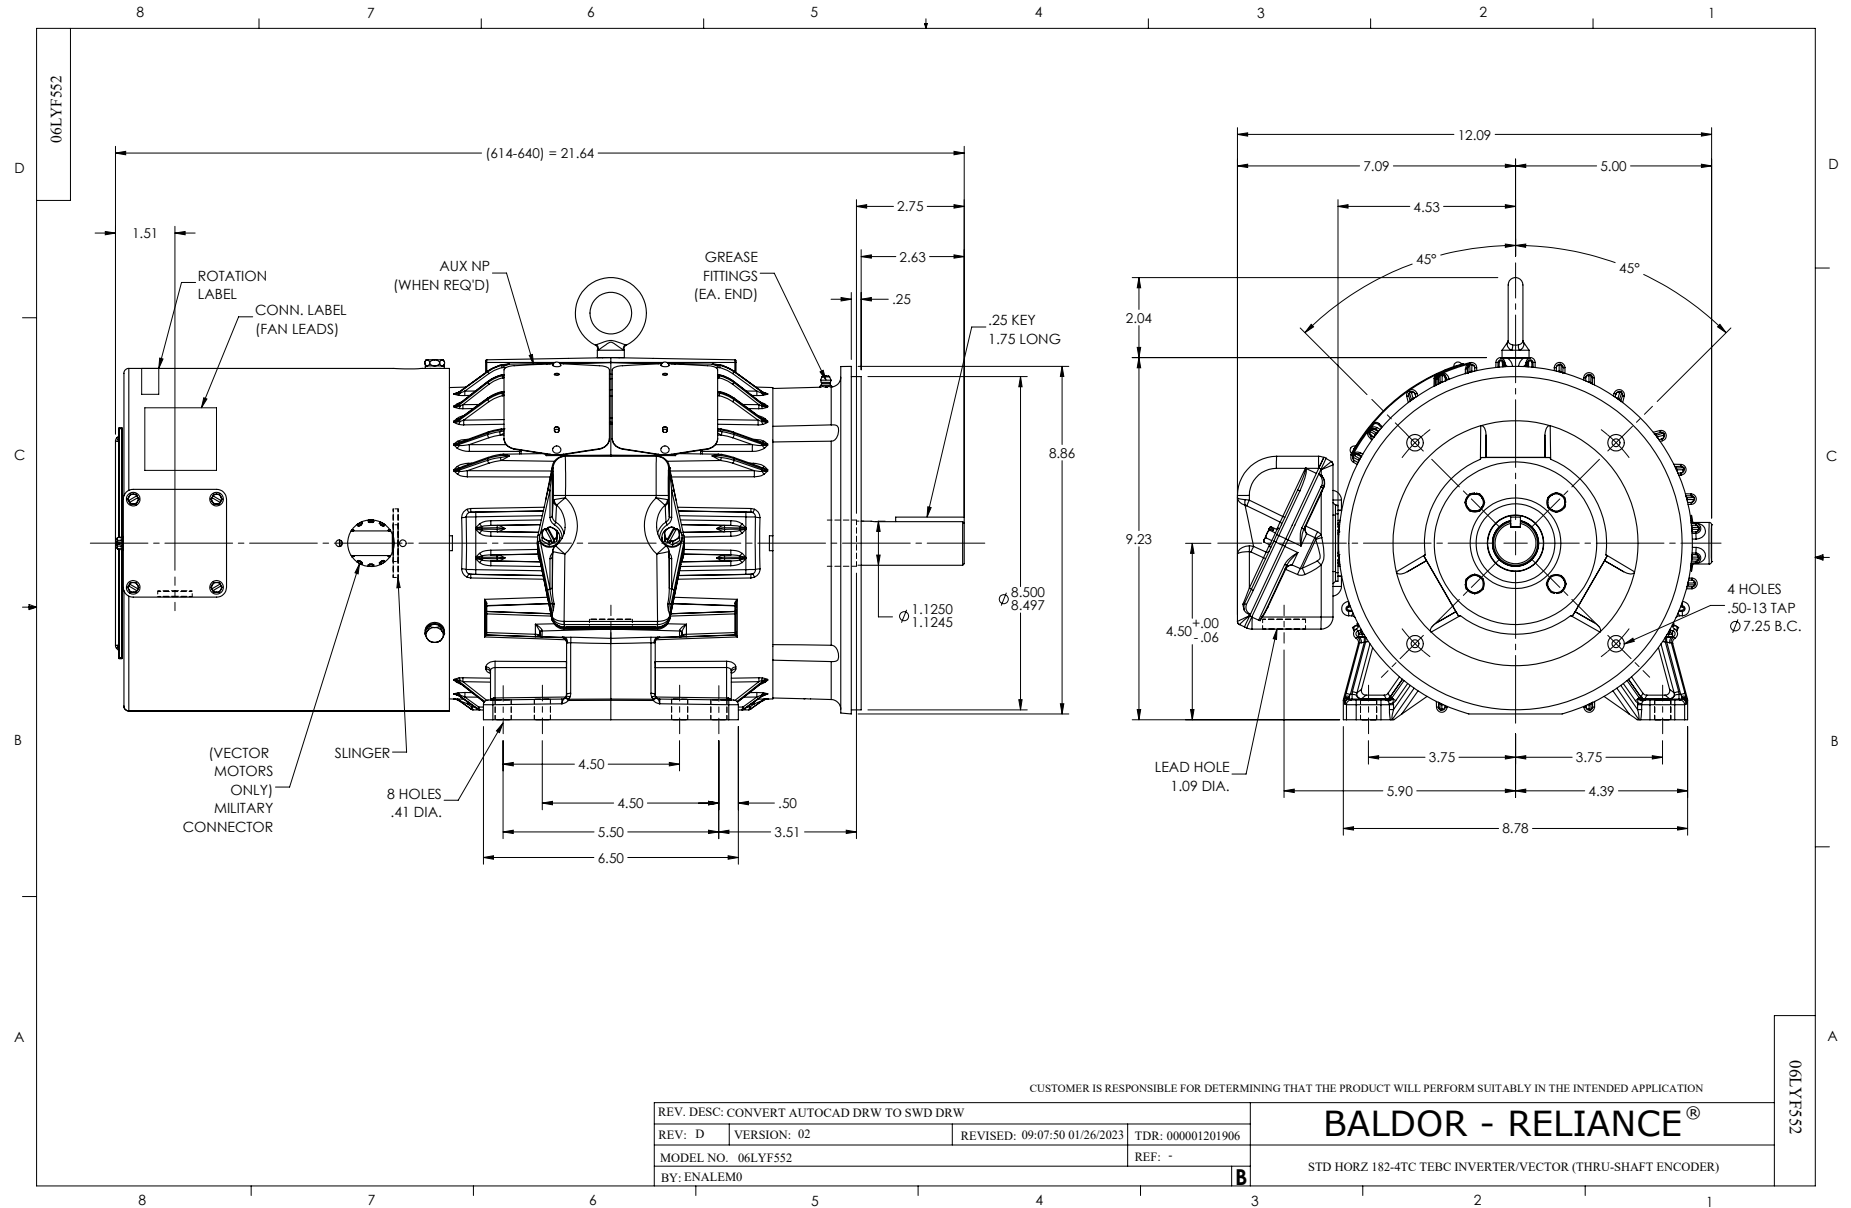

CD0006

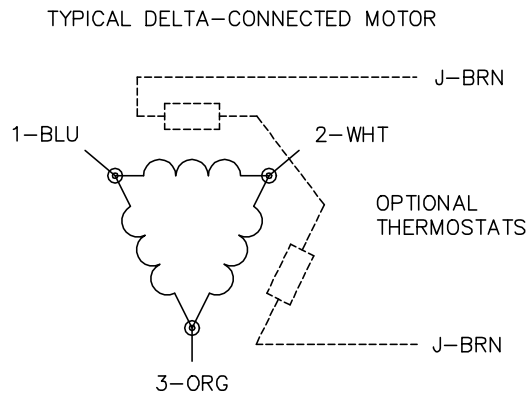

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10:24:49 02/19/2019	BY: ENBRIRO
MTL: -		© □

**BALDOR - RELIANCE®**

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1