

NP VOLTS	460	MAX RPM	4000	9 Lead	WYE Connected HVC
NP AMPS	3.7	Base Volt	480	BEMF	212
HP	3	NL AMPS	0.1	Ld	57.7
BASE SPEED	1800	S.F.	1.50	Lq	217.0
PHASE/HZ	3/60	WK ² (lb-ft ²)	27.6	Rs	8.880
					Meas L-L

Motor Rated Full Load Data

	RPM	HP	Torque	Volts	Freq-Hz	Amps
Base Speed	1800	3.0	8.8	460	60	3.7
Max Speed	4000	3.0	3.9	460	133.3	3.7
Min Speed	180	0.8	8.8	460	6.0	3.7

Motor Load Performance at Base Speed

	RPM	HP	Torque	Volts	Eff	Amps
No Load	1800	0.0	0.0	460	N/A	0.1
1/4	1800	0.8	2.2	460	79.8	0.9
1/2	1800	1.5	4.4	460	89.1	1.9
3/4	1800	2.3	6.6	460	91.9	2.8
Full Load	1800	3.0	8.8	460	92.8	3.7
O/L	1800	4.5	13.1	460	N/A	5.6

Remarks: Calculated Data
ECS Vector PWM IPM




DR BY R&D
 CK BY USJAROB1
 APP BY ENG
 DATE 8/17/2020

A-C MOTOR
 PERFORMANCE
 CURVES
 ECS101M0H3EF4
 36WGA0019-B001

NP VOLTS	460	MAX RPM	4000	WYE Connected HVC		
NP AMPS	3.7	Base Volt	480	BEMF	212	
HP	3	NL AMPS	0.1	Ld	57.7	
BASE SPEED	1800	S.F.	1.5	Lq	217.0	
PHASE/HZ	3/60	WK ² (lb-ft ²)	27.6	Rs	8.880	Meas L-L

Motor Performance Capability at Rated Load, ECS Vector PWM
Variable Speed IPM Motor Curves

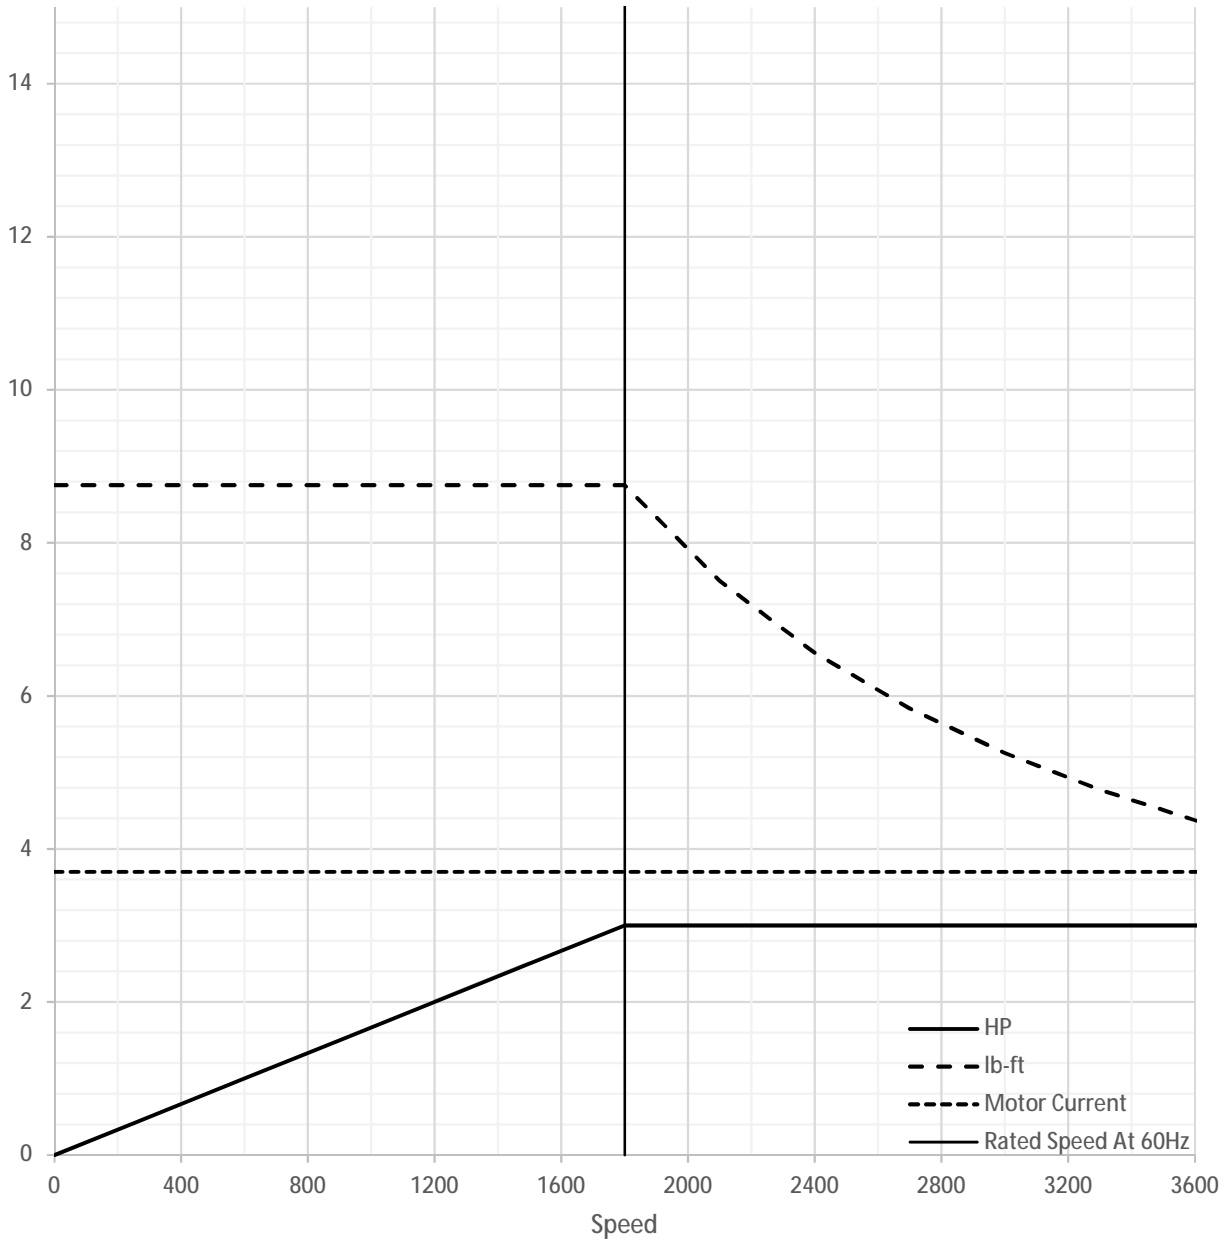

Calculated Data

Data Valid For Nameplate Ratings

BALDOR • RELIANCE

DR BY R&D
 CK BY USJAROB1
 APP BY ENG
 DATE 8/17/2020

A-C MOTOR
 PERFORMANCE
 CURVES

Calculated Data
 36WGA0019-B001