

NP VOLTS	460	MAX RPM	4000	9 Lead	WYE Connected HVC
NP AMPS	5.8	Base Volt	480	BEMF	252
HP	5	NL AMPS	0.1	Ld	54.0
BASE SPEED	1800	S.F.	1.50	Lq	191.0
PHASE/HZ	3/60	WK ² (lb-ft ²)	35.9	Rs	3.300 Meas L-L

Motor Rated Full Load Data

	RPM	HP	Torque	Volts	Freq-Hz	Amps
Base Speed	1800	5.0	14.6	460	60	5.8
Max Speed	4000	5.0	6.6	460	133.3	5.8
Min Speed	180	0.8	14.6	460	6.0	5.8

Motor Load Performance at Base Speed

	RPM	HP	Torque	Volts	Eff	Amps
No Load	1800	0.0	0.0	460	N/A	0.1
1/4	1800	1.3	3.6	460	80.6	1.5
1/2	1800	2.5	7.3	460	90.0	2.9
3/4	1800	3.8	10.9	460	92.8	4.4
Full Load	1800	5.0	14.6	460	93.7	5.8
O/L	1800	7.5	21.9	460	N/A	8.7

Remarks: Calculated Data
ECS Vector PWM IPM


BALDOR • RELIANCE

DR BY R&D
 CK BY USJAROB1
 APP BY ENG
 DATE 8/17/2020

A-C MOTOR
 PERFORMANCE
 CURVES
 ECS101M0H5EF4
 36WGA0020-B001

NP VOLTS	460	MAX RPM	4000	WYE Connected HVC		
NP AMPS	5.8	Base Volt	480	BEMF	252	
HP	5	NL AMPS	0.1	Ld	54.0	
BASE SPEED	1800	S.F.	1.5	Lq	191.0	
PHASE/HZ	3/60	WK ² (lb-ft ²)	35.9	Rs	3.300	Meas L-L

Motor Performance Capability at Rated Load, ECS Vector PWM
Variable Speed IPM Motor Curves

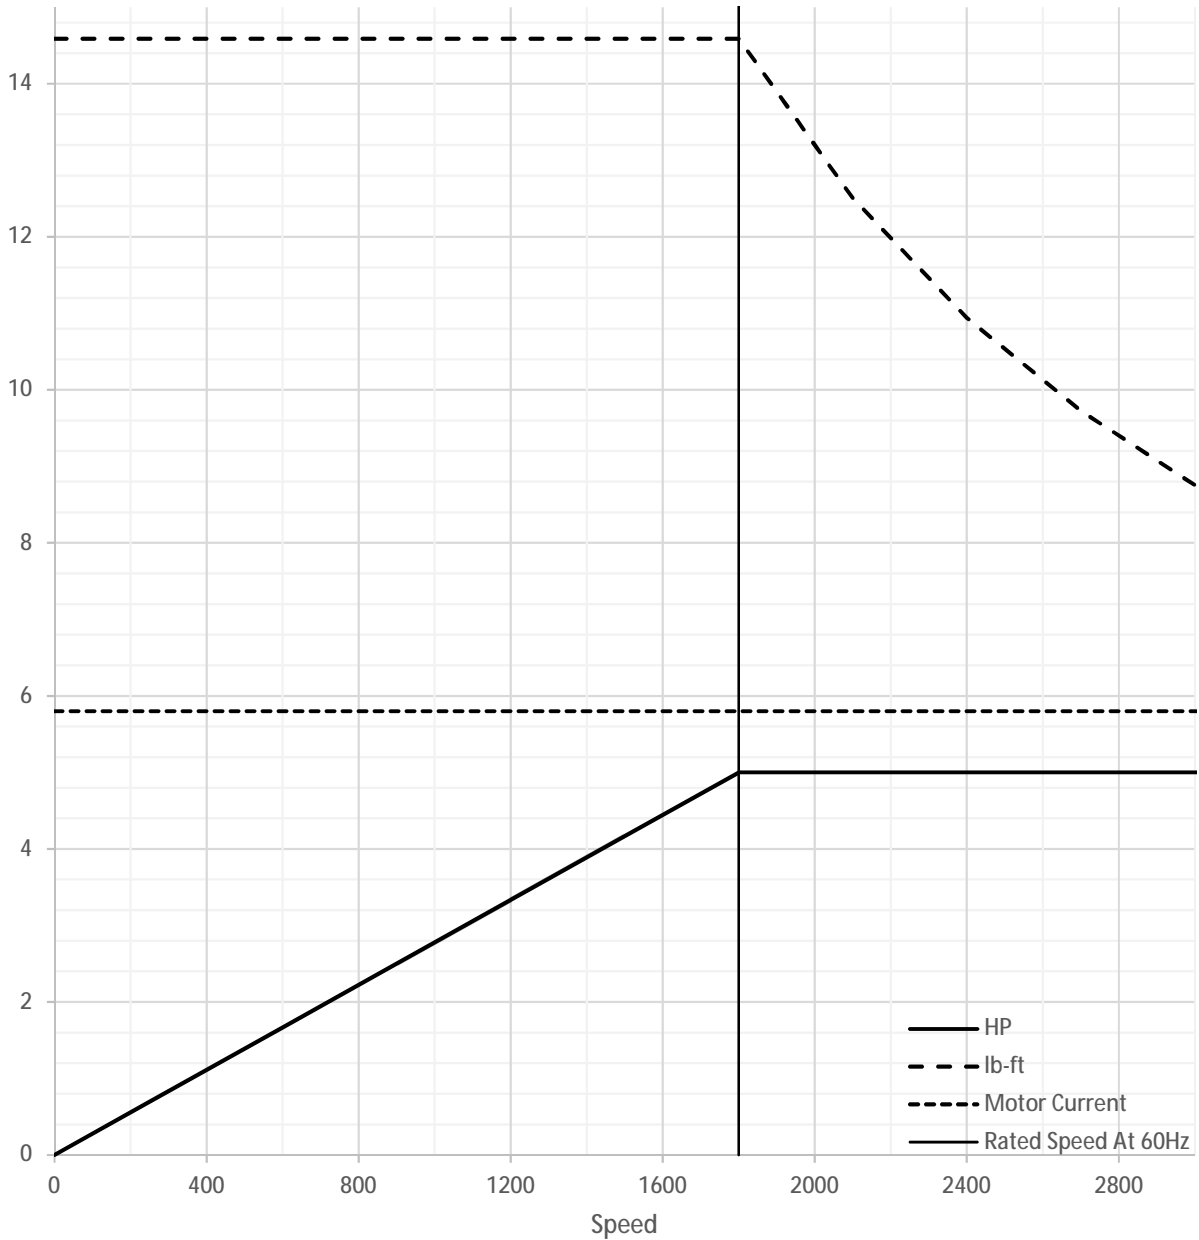

Calculated Data

Data Valid For Nameplate Ratings

BALDOR • RELIANCE

DR BY R&D
 CK BY USJAROB1
 APP BY ENG
 DATE 8/17/2020

A-C MOTOR
 PERFORMANCE
 CURVES

Calculated Data
 36WGA0020-B001