

**BALDOR • RELIANCE**

---

# Customer information packet

## CEL11303

.5HP, 3450RPM, 1PH, 60HZ, 56C, 3413LC, OPEN, F1

Class - None

Division - Not Applicable

## Specifications

Enclosure	OPEN
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	.500 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CURUSEEV
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	2.500 A @ 230.0 V 4.900 A @ 115.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	72.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.5 a
Insulation Class	B

## Part detail

Revision	G
Type	AC
Mech. spec.	34F867
Base	
Status	PRD/A
Elec. spec.	34WGR142
Layout	34LYF867
Eff. date	05-16-2024
CD Diagram	CD0055
Poles	02
Leads	6#18
Proprietary	False
Created date	09-25-2014

Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3413LC
Mounting Arrangement	F1
Number of Poles	2
Overall Length	10.74 IN
Power Factor	91
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

**Nameplate**

<b>NP3155L</b>									
<b>CAT.NO.</b>	CEL11303								
<b>SPEC.</b>	34F867R142G1								
<b>HP</b>	.5								
<b>VOLTS</b>	115/230								
<b>AMP</b>	4.9/2.5								
<b>RPM</b>	3450								
<b>FRAME</b>	56C		<b>HZ</b>	60		<b>PH</b>	1		
<b>SER.F.</b>	1.25	<b>CODE</b>	L	<b>DES</b>	N	<b>CL</b>	B		
<b>F.L. AVG. EFF.</b>	72.4	<b>PF</b>	91						
<b>RATING</b>	40C AMB-CONT								
<b>CC</b>									
<b>DE</b>	6203		<b>ODE</b>	6203					
<b>ENCL</b>	OPEN	<b>SN</b>							
	SFA 5.8/2.9								

**AC Induction Motor Performance Data**

Record # 47426

Typical performance - not guaranteed values

<b>Winding: 34WGR142-R002</b>		<b>Type: 3413LC</b>		<b>Enclosure: OPEN</b>	
<b>Nameplate Data</b>			<b>115 V, 60 Hz: Low Voltage Connection</b>		
<b>Rated Output (HP)</b>	.5	<b>Full Load Torque</b>	0.755 LB-FT		
<b>Volts</b>	115/230	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	4.9/2.5	<b>Breakdown Torque</b>	2.5 LB-FT		
<b>R.P.M.</b>	3450	<b>Pull-up Torque</b>	1.78 LB-FT		
<b>Hz</b>	60 <b>Phase</b>	1	<b>Locked-rotor Torque</b>	2.47 LB-FT	
<b>NEMA Design Code</b>	N <b>KVA Code</b>	L	<b>Starting Current</b>	38 A	
<b>Service Factor (S.F.)</b>	1.25		<b>No-load Current</b>	2.28 A	
<b>NEMA Nom. Eff.</b>	72.4 <b>Power Factor</b>	91	<b>Line-line Res. @ 25°C</b>	1.1337 Ω A Ph 4.8491 Ω B Ph	
<b>Rating - Duty</b>	40C AMB-CONT		<b>Temp. Rise @ Rated Load</b>	21°C	
<b>S.F. Amps</b>	5.8/2.9		<b>Temp. Rise @ S.F. Load</b>	27°C	

**Load Characteristics 115 V, 60 Hz, 0.5 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>S.F.</b>
<b>Power Factor</b>	70	82	88	91	93	94	93
<b>Efficiency</b>	42.8	59.4	69.9	73.5	73	73.2	73
<b>Speed</b>	3561.5	3535	3512.3	3480.9	3435.5	3401.6	3436
<b>Line amperes</b>	2.67	3.33	3.96	4.83	6	7.05	6


ABB Motors and Mechanical Inc.

WINDING # 34WGR142

Typical performance - not guaranteed values.

0.5 HP 1 PH 60 HZ 3450 RPM 115 V 3413LC

TORQUES (LB-FT): PO=2.5 PU=1.78 LR=2.47 LRA=38

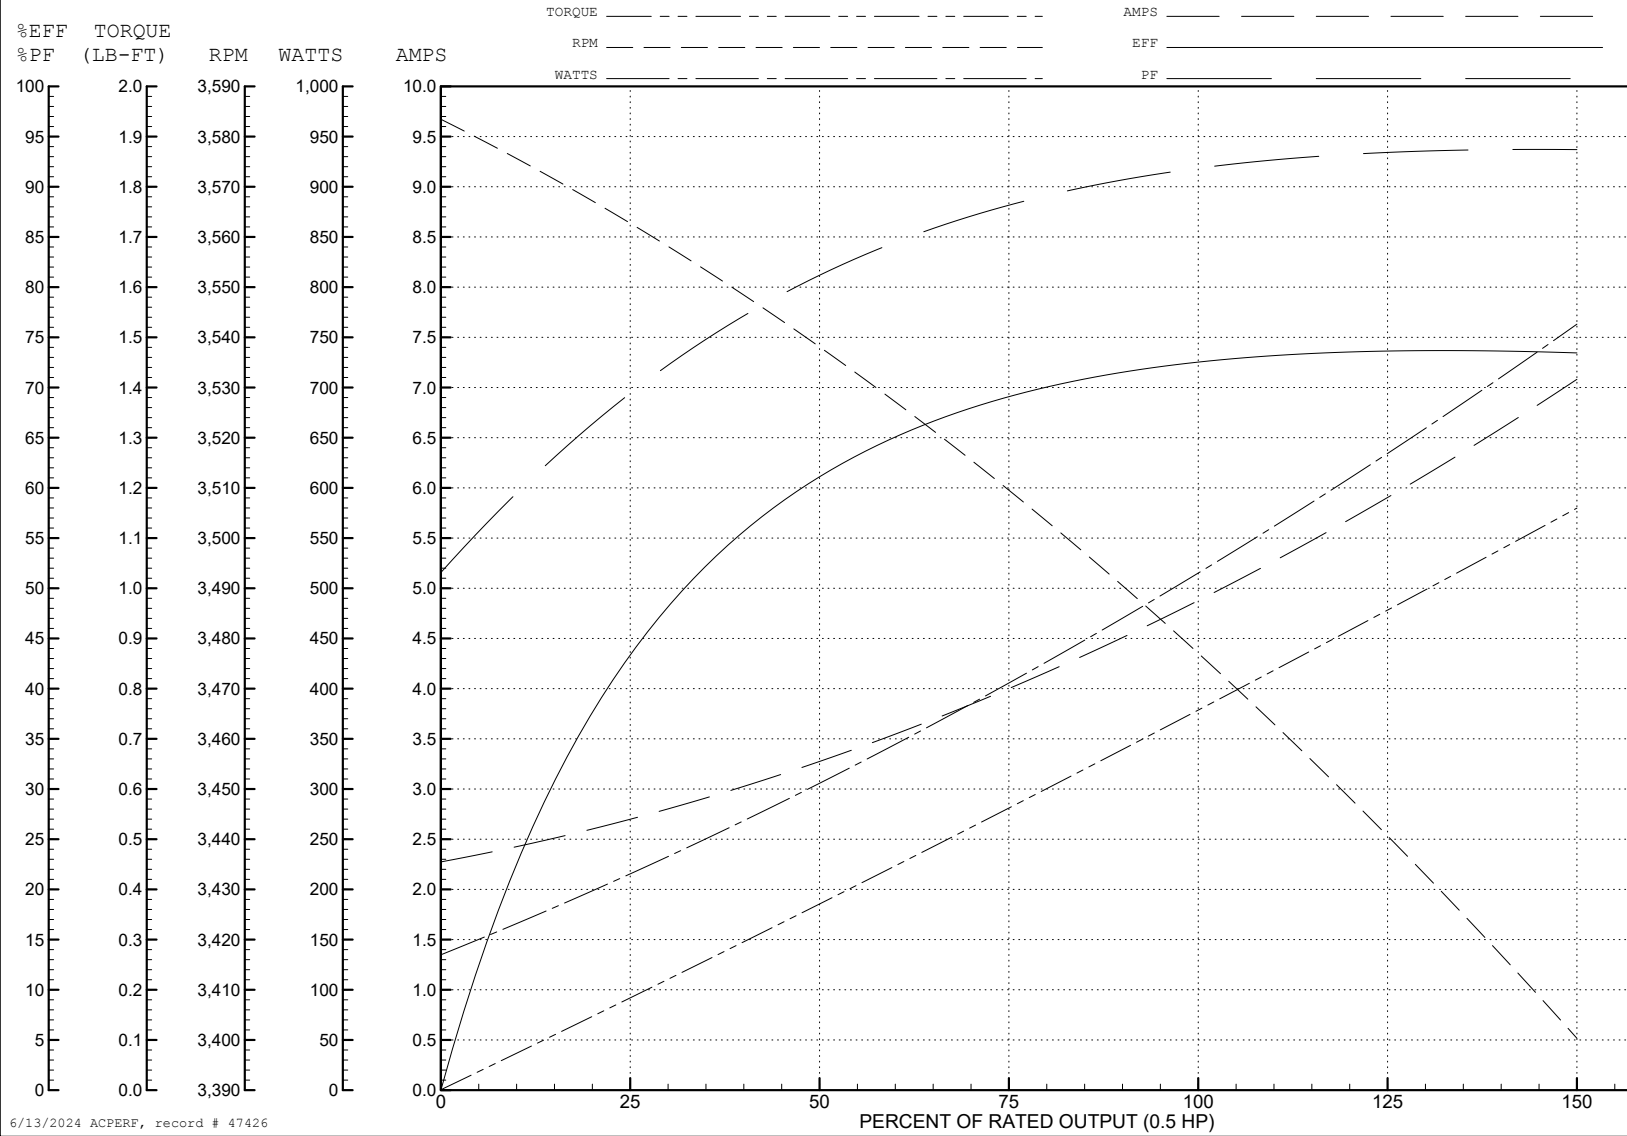

6/13/2024 ACPERF, record # 47426

**AC Induction Motor Performance Data**

Record # 49399

Typical performance - not guaranteed values

Winding: 34WGR142-R002		Type: 3413LC	Enclosure: OPEN	
<b>Nameplate Data</b>			<b>230 V, 60 Hz: High Voltage Connection</b>	
Rated Output (HP)	.5	Full Load Torque	0.755 LB-FT	
Volts	115/230	Start Configuration	direct on line	
Full Load Amps	4.9/2.5	Breakdown Torque	2.5 LB-FT	
R.P.M.	3450	Pull-up Torque	1.52 LB-FT	
Hz	60 Phase	Locked-rotor Torque	2.11 LB-FT	
NEMA Design Code	N KVA Code	Starting Current	18.66 A	
Service Factor (S.F.)	1.25	No-load Current	1.15 A	
NEMA Nom. Eff.	72.4 Power Factor	Line-line Res. @ 25°C	4.36 Ω A Ph 4.65 Ω B Ph	
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	21°C	
S.F. Amps	5.8/2.9	Temp. Rise @ S.F. Load	25°C	
		Rotor inertia	0.0121 LB-FT <sup>2</sup>	

**Load Characteristics 230 V, 60 Hz, 0.5 HP**

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	71	83	88	92	93	94	93
Efficiency	42.3	58.9	69.5	73.2	72.8	73.3	72.8
Speed	3562	3535	3512	3481	3436	3402	3436
Line amperes	1.34	1.67	1.99	2.42	3.01	3.53	3.01


ABB Motors and Mechanical Inc.

WINDING # 34WGR142

0.5 HP 1 PH 60 HZ 3450 RPM 230 V 3413LC


Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=2.5 PU=1.52 LR=2.11 LRA=18.66

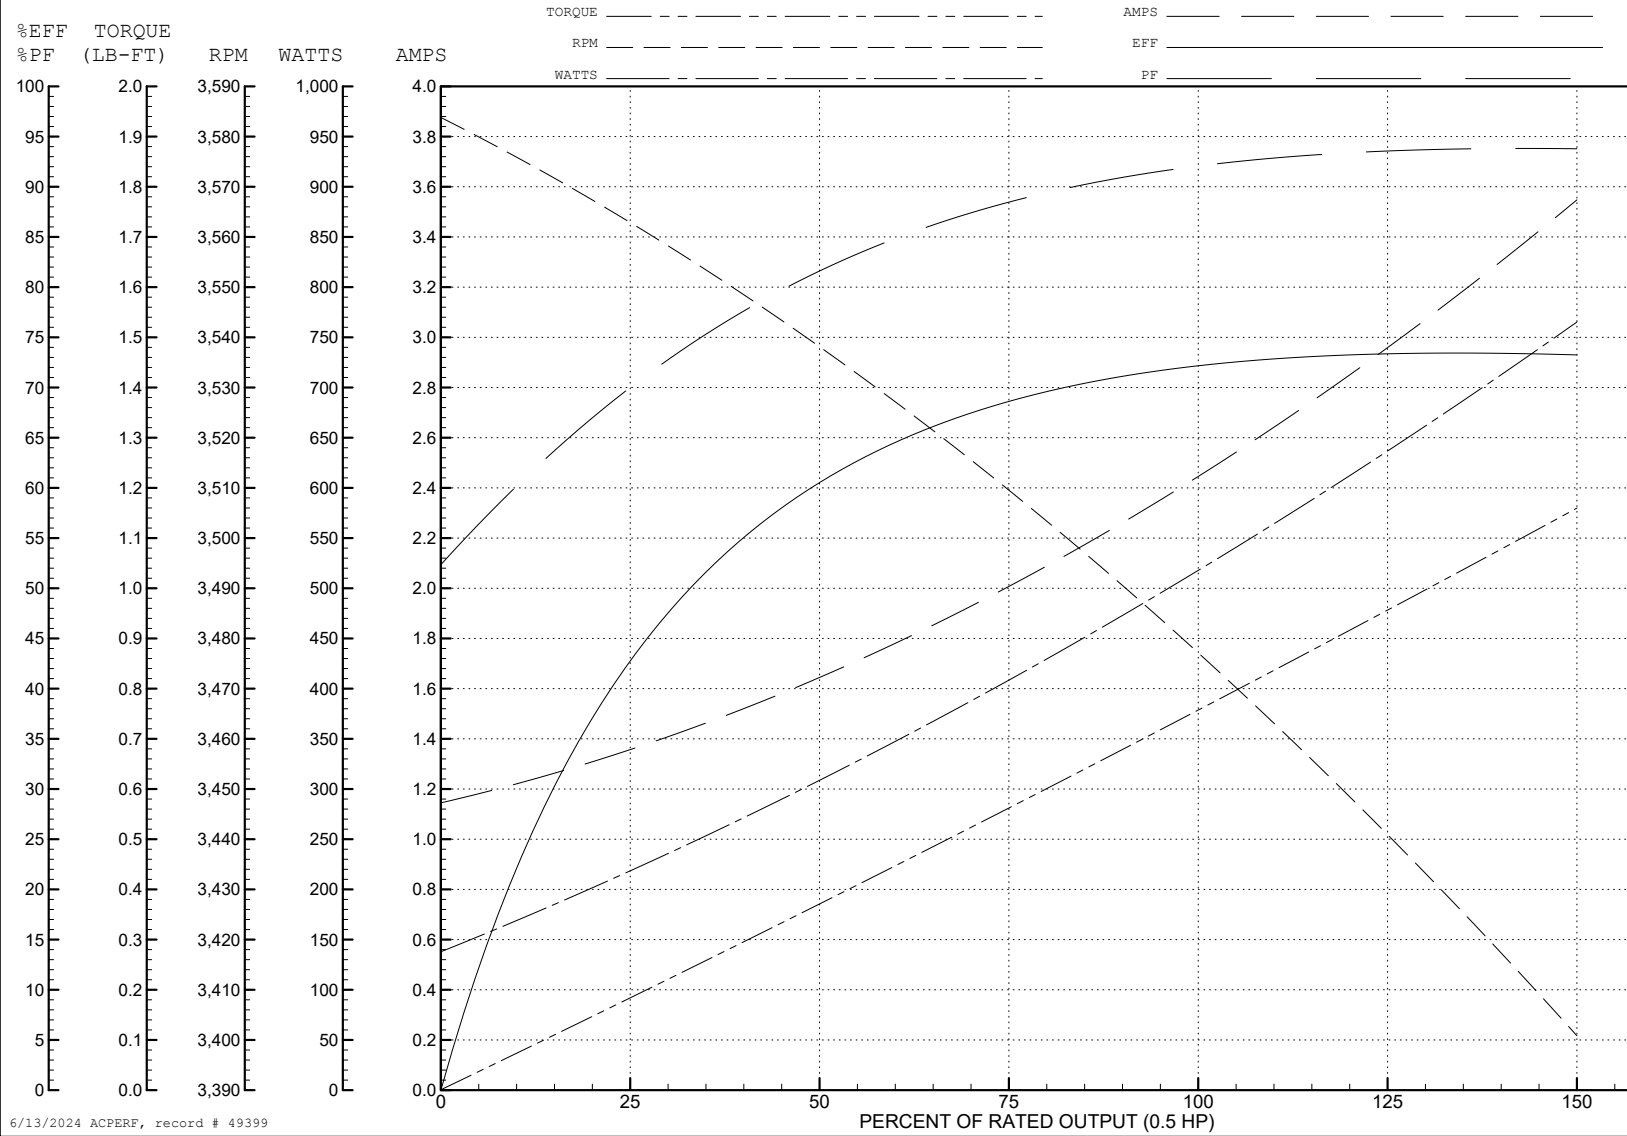

6/13/2024 ACPERF, record # 49399



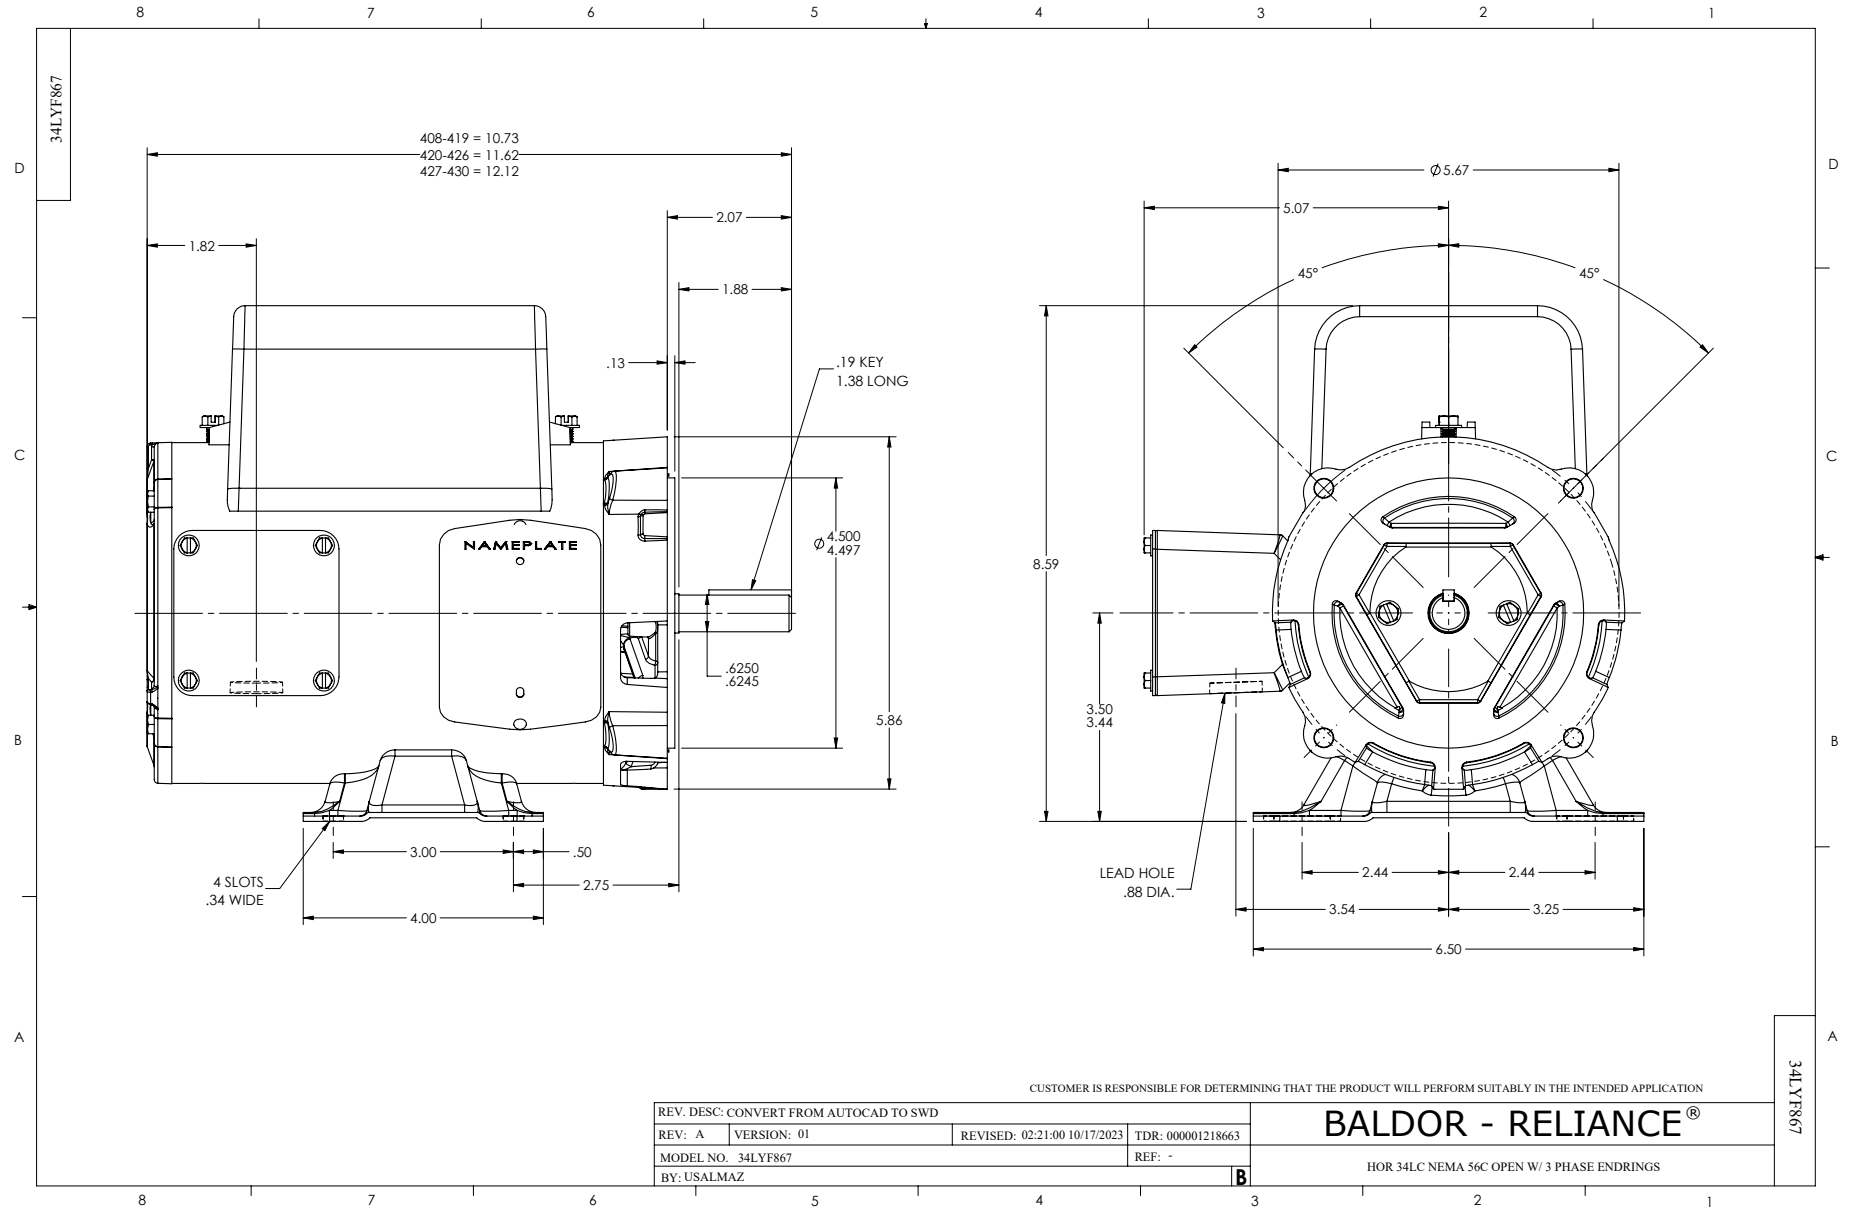


CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: CONVERT FROM AUTOCAD TO SWD			
REV: A	VERSION: 01	REVISED: 02:21:00 10/17/2023	TDR: 000001218663
MODEL NO. 34LYF867		REF: -	
BY: USALMAZ			

**BALDOR - RELIANCE®**

HOR 34LC NEMA 56C OPEN W/ 3 PHASE ENDRINGS

CD0055

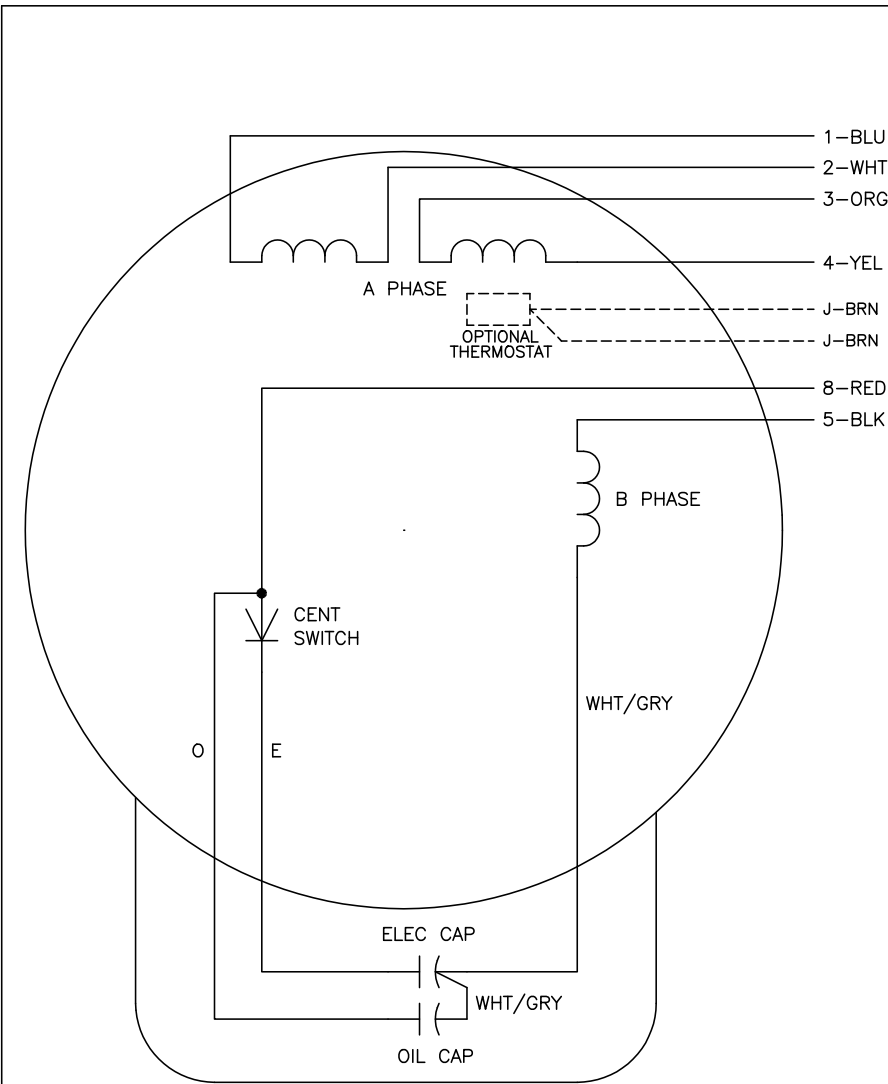

	LINE A	LINE B	JOIN
HIGH STD	1	4,5	2,3,8
HIGH OPP	1	4,8	2,3,5
LOW STD	1,3,8	2,4,5	-
LOW OPP	1,3,5	2,4,8	-

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: D	BY: JLP	REVISED: 04/08/99 1:17	TDR: 0178636
C00000		FILE: AAA00007414	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

TYPE LC, DV, REV, 6 LEADS

CD0055