ABB BALDOR RELIANCE

Customer information packet

CESWDM3559T

3HP, 3470RPM, 3PH, 60HZ, 143TC, 3546M, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/3/2026 4:07:32 AM

Specifications

Enclosure	TEFC
Frame	143TC
Frame Material	Stainless Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
	230.0 V @ 60 HZ
	208.0 V @ 60 HZ
Agency Approvals	CSA
	CSA EEV
	NEMA PREMIUM
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	7.400 A @ 230.0 V
	7.700 A @ 208.0 V
	3.700 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	86.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK

Part Detail

Revision	G
Type	AC
Mech. spec.	35SS628
Base	
Status	PRD/A
Elec. spec.	35WGR930
Layout	35LYSS628
Eff. date	02-14-2024
CD Diagram	CD0005
Poles	02
Leads	9#18
Proprietary	False
Created date	03-15-2018

Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	3.7 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	P
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3546M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	15.54 IN
Power Factor	91
Product Family	Wash Down Paint Free
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3470 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2	None

Nameplate

NP1669L								
CAT.NO.	CESWDM3559T							
SPEC.	35SS628R930G1							
HP	3							
VOLTS	208-230/460							
AMP	7.7-7.4/3.7							
RPM	3470							
FRAME	143TC	**HZ**	60			**PH**	3	
SER.F.	1.15	**CODE**	P	**DES**	A	**CLASS**	F	
NEMA-NOM-EFF	86.5	**PF**	91					
RATING	40C AMB-CONT							
CC	010A							
DE	6205	**ODE**	6203					
ENCL	TEFC	**SN**						
BLANK								

AC Induction Motor Performance Data
Record # 35682
Typical performance - not guaranteed values

Winding: 35WGR930-R006	**Type:** 3546M	**Enclosure:** TEFC

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			3	**Full Load Torque**	4.5 LB-FT
Volts			208-230/460	**Start Configuration**	direct on line
Full Load Amps			7.7-7.4/3.7	**Breakdown Torque**	17.2 LB-FT
R.P.M.			3470	**Pull-up Torque**	10.5 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	17 LB-FT
NEMA Design Code	A	**KVA Code**	P	**Starting Current**	48.3 A
Service Factor (S.F.)			1.15	**No-load Current**	1.25 A
NEMA Nom. Eff.	86.5	**Power Factor**	91	**Line-line Res. @ 25ºC**	3.48 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	63°C
S.F. Amps				**Temp. Rise @ S.F. Load**	74°C
				Locked-rotor Power Factor	42
				Rotor inertia	0.127 LB-FT2

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	59	79	87	90	91	90	91
Efficiency	80.1	86.4	87.3	86.9	85.7	83.9	86.2
Speed	3567	3541	3510	3479	3443	3403	3457
Line amperes	1.53	2.07	2.78	3.55	4.42	5.4	4.07


ABB Motors and Mechanical Inc.


WINDING # 35WGR930

3 HP 3 PH 60 HZ 3470 RPM 460 V 3546M


Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=17.2 PU=10.5 LR=17 LRA=48.3

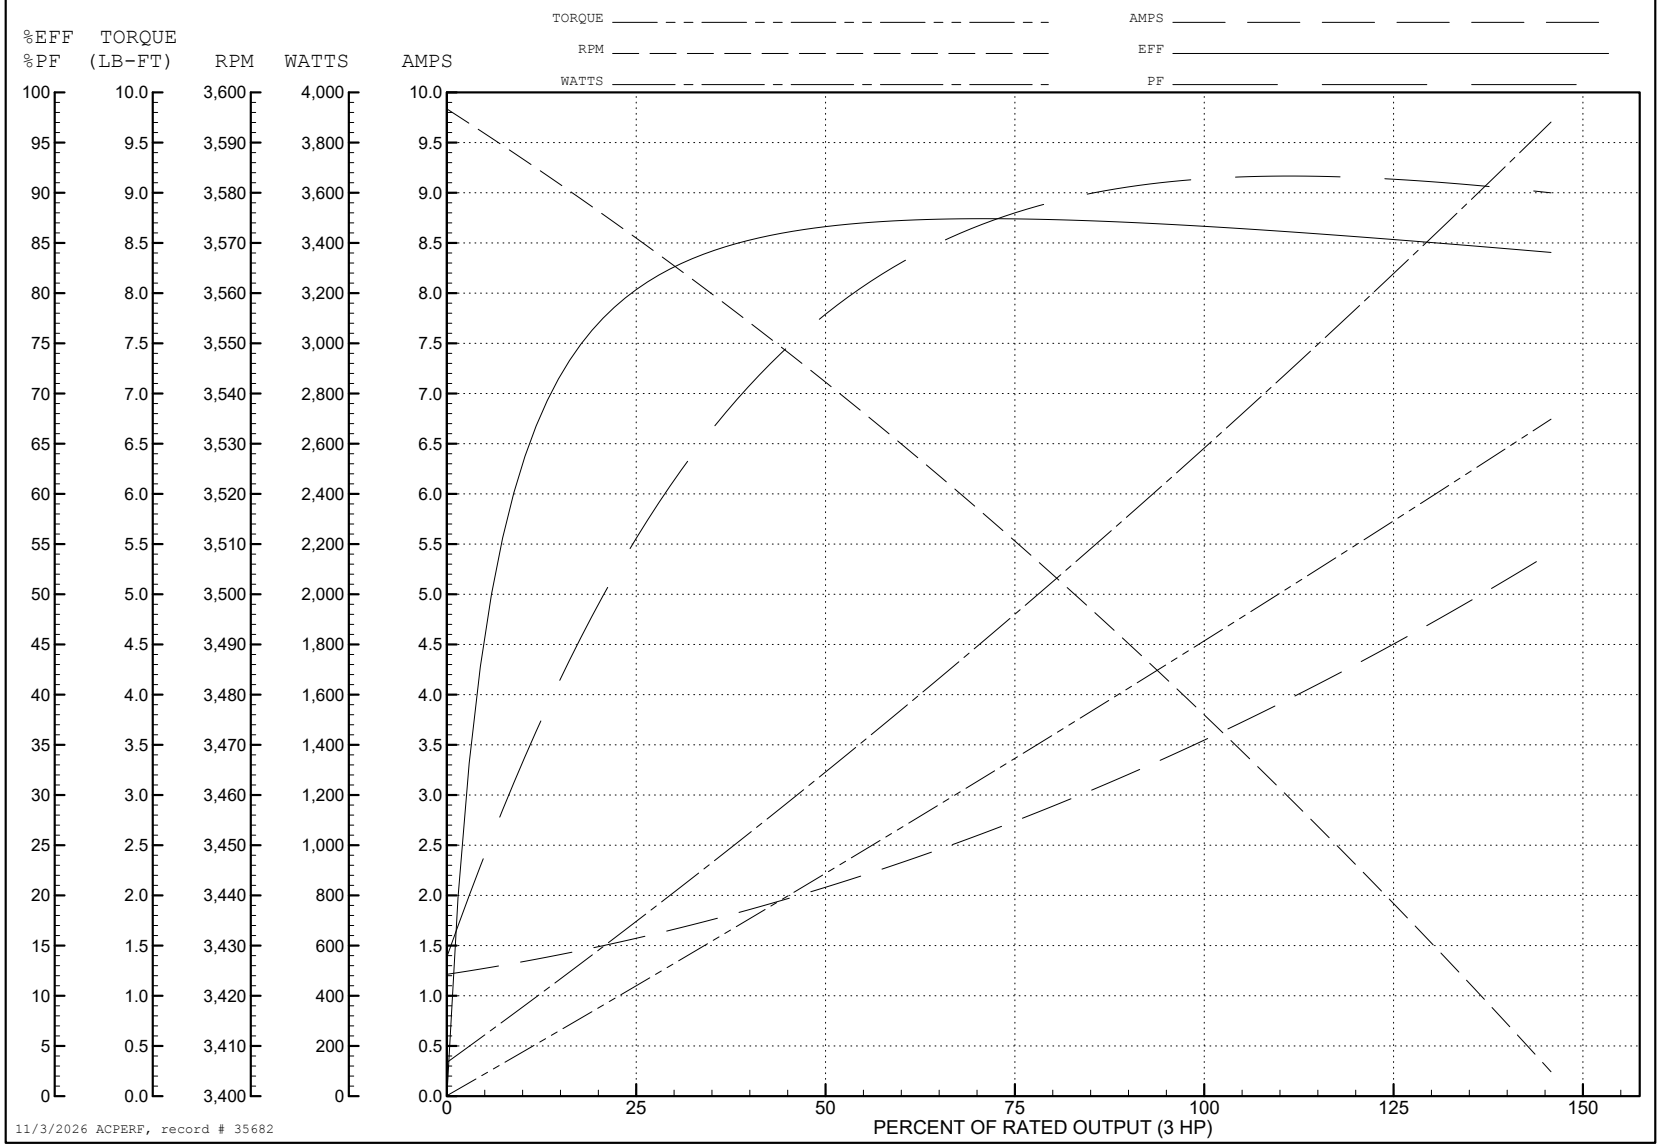

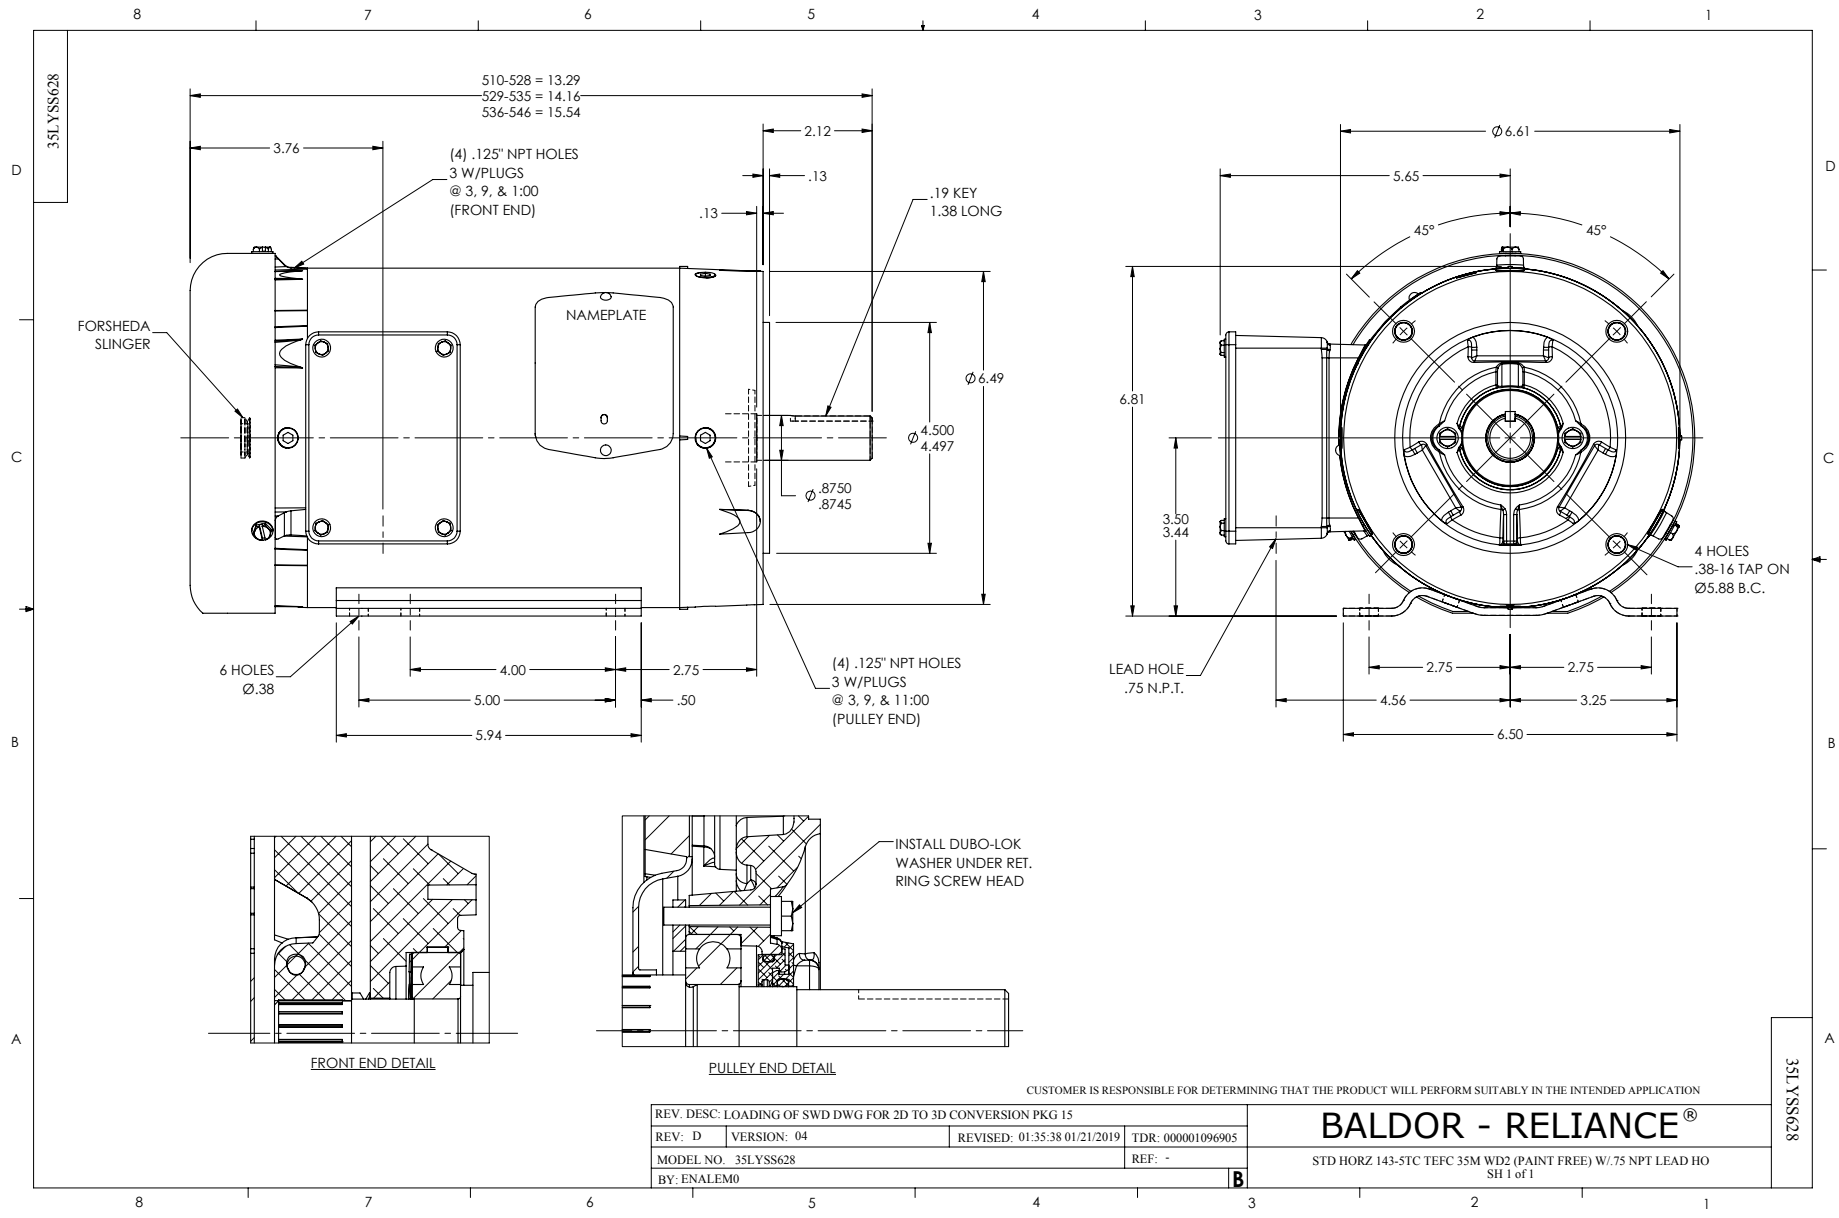
35LYSS628
510-528 = 13.29
529-535 = 14.16
536-546 = 15.54
3.76
2.12
.13
.13
(4) .125" NPT HOLES
3 W/PLUGS
@ 3, 9, & 1:00
(FRONT END)
.19 KEY
1.38 LONG
FORSHEDA
SLINGER
NAMEPLATE
Ø6.49
Ø4.500
4.497
Ø.8750
.8745
6 HOLES
Ø.38
4.00
2.75
5.00
.50
5.94
(4) .125" NPT HOLES
3 W/PLUGS
@ 3, 9, & 11:00
(PULLEY END)
Ø6.61
5.65
45°
45°
6.81
3.50
3.44
4 HOLES
.38-16 TAP ON
Ø5.88 B.C.
LEAD HOLE
.75 N.P.T.
2.75
2.75
4.56
3.25
6.50
INSTALL DUBO-LOK
WASHER UNDER RET.
RING SCREW HEAD
FRONT END DETAIL
PULLEY END DETAIL
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: LOADING OF SWD DWG FOR 2D TO 3D CONVERSION PKG 15
REV: D
VERSION: 04
REVISED: 01:35:38 01/21/2019
TDR: 000001096905
MODEL NO. 35LYSS628
REF: -
BY: ENALEM0
B
BALDOR - RELIANCE®
STD HORZ 143-5TC TEFC 35M WD2 (PAINT FREE) W/.75 NPT LEAD HO
SH 1 of 1
35LYSS628

CD0005

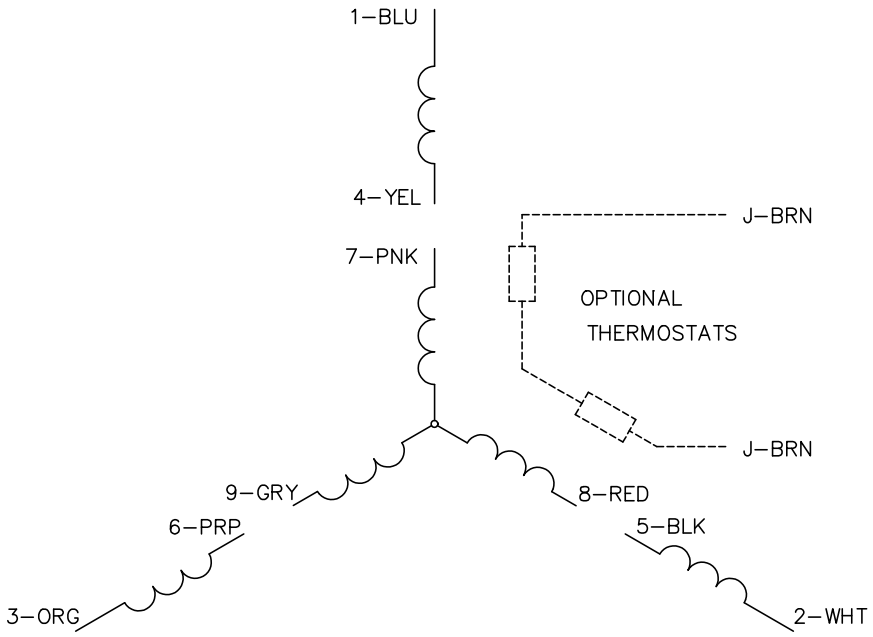

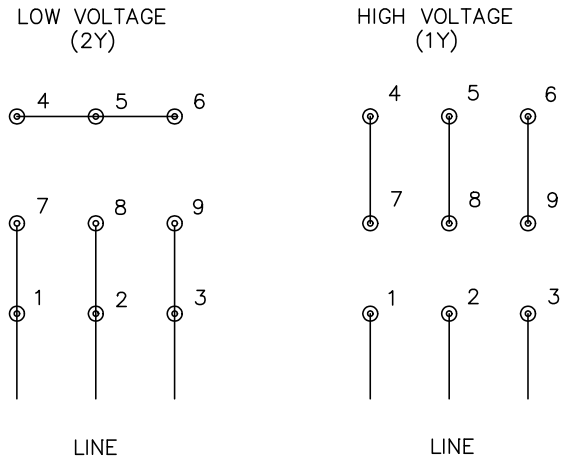

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS