

# ABB BALDOR RELIANCE III

---

## Customer information packet

### ECP84108T-5

30HP, 3525RPM, 3PH, 60HZ, 286TS, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

**Specifications**

<b>Enclosure</b>	TEFC
<b>Frame</b>	286TS
<b>Frame Material</b>	Iron
<b>Frequency</b>	60.00 Hz
<b>Haz Area Class and Group</b>	CLI GP A,B,C,D
<b>Haz Area Division</b>	Division II
<b>Motor Letter Type</b>	Three Phase
<b>Output @ Frequency</b>	30.000 HP @ 60 HZ
<b>Phase</b>	3
<b>Synchronous Speed @ Frequency</b>	3600 RPM @ 60 HZ
<b>Voltage @ Frequency</b>	575.0 V @ 60 HZ
<b>Agency Approvals</b>	CCSA US CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
<b>Ambient Temperature</b>	40 °C
<b>Auxiliary Box</b>	NO AUXILLARY BOX
<b>Auxiliary Box Lead Termination</b>	None
<b>Base Indicator</b>	Rigid
<b>Bearing Grease Type</b>	Polyrex EM (-20F +300F)
<b>Blower</b>	None
<b>Constant Torque Speed Range</b>	1.3
<b>Current @ Voltage</b>	27.300 A @ 575.0 V
<b>Design Code</b>	B
<b>Drip Cover</b>	No Drip Cover
<b>Duty Rating</b>	CONT
<b>Efficiency @ 100% Load</b>	91.7 %
<b>Electrically Isolated Bearing</b>	Not Electrically Isolated
<b>Enclosure Modification</b>	841
<b>Feedback Device</b>	NO FEEDBACK
<b>Haz Area Temp Code</b>	T3

**Part Detail**

<b>Revision</b>	K
<b>Type</b>	AC
<b>Mech. spec.</b>	
<b>Base</b>	
<b>Status</b>	PRD/A
<b>Elec. spec.</b>	10WGZ523
<b>Layout</b>	10LYJ567
<b>Eff. date</b>	09-26-2025
<b>CD Diagram</b>	CD0006
<b>Poles</b>	02
<b>Leads</b>	3#10
<b>Proprietary</b>	False
<b>Created date</b>	12-06-2018

<b>Heater Indicator</b>	No Heater
<b>High Voltage Full Load Amps</b>	27.3 a
<b>Insulation Class</b>	F
<b>Inverter Code</b>	Inverter Duty
<b>IP Rating</b>	IP56
<b>KVA Code</b>	F
<b>Lifting Lugs</b>	Standard Lifting Lugs
<b>Locked Bearing Indicator</b>	Locked Bearing
<b>Max Speed</b>	5400 rpm
<b>Motor Lead Termination</b>	Ring Terminals
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	1048M
<b>Mounting Arrangement</b>	F1
<b>Number of Poles</b>	2
<b>Overall Length</b>	26.57 IN
<b>Power Factor</b>	90
<b>Product Family</b>	Chem Process S/P 32-8 IEEE 841
<b>Pulley Face Code</b>	Standard
<b>Rodent Screen</b>	None
<b>Service Factor</b>	1.15
<b>Shaft Diameter</b>	1.625 IN
<b>Shaft Ground Indicator</b>	No Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Speed</b>	3525 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	None
<b>Vibration Sensor Indicator</b>	No Vibration Sensor
<b>Winding Thermal 1</b>	None
<b>Winding Thermal 2</b>	None

**Nameplate**

**NP4332**

<b>CAT.NO.</b>	ECP84108T-5	<b>P/N</b>		<b>ENCLOSURE</b>	TEFC
<b>SPEC.</b>	10-0000-0403	<b>CC</b>	010A	<b>FRAME</b>	286TS
<b>HP</b>	30	<b>CLASS</b>	F	<b>HZ</b>	60
<b>RPM</b>	3525	<b>RPM MAX</b>	5400	<b>PH</b>	3
<b>VOLT</b>	575	<b>KVA-CODE</b>	F	<b>O.D.E. BRG.</b>	55BC03X30X
<b>AMP</b>	27.3	<b>MOTOR WEIGHT</b>	422	<b>GREASE</b>	POLYREX EM
<b>RATING</b>	40C AMB-CONT	<b>MAX. KVAR</b>	3.8	<b>BLANK</b>	
<b>NEMA-NOM-EFF</b>	91.7	<b># OF ROTOR BARS</b>	28	<b>SER.F.</b>	1.15
<b>G.MIN.EFF</b>	90.2	<b># OF STATOR SLOTS</b>	36	<b>PF</b>	90
<b>TEMP CODE</b>	T3	<b>INVERTER-TEMP-CODE</b>	200	<b>INV.TYPE</b>	PWM
<b>TEMP =</b>	200	<b>C HP FR</b>	60	<b>C HP TO</b>	90
<b>CT HZ FROM</b>	1.3	<b>CT HZ TO</b>	60		
<b>HTR-VOLTS</b>		<b>HTR-AMPS</b>		<b>HTR-WATTS</b>	
				<b>MAX. SPACE HEATER TEMP.</b>	
				<b>VT HZ FROM</b>	0
				<b>VT HZ TO</b>	60


ABB Motors and Mechanical Inc.

WINDING # 10WGZ523


30 HP 3 PH 60 HZ 3525 RPM 575 V 1048M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=132 PU=46 LR=63.8 LRA=166

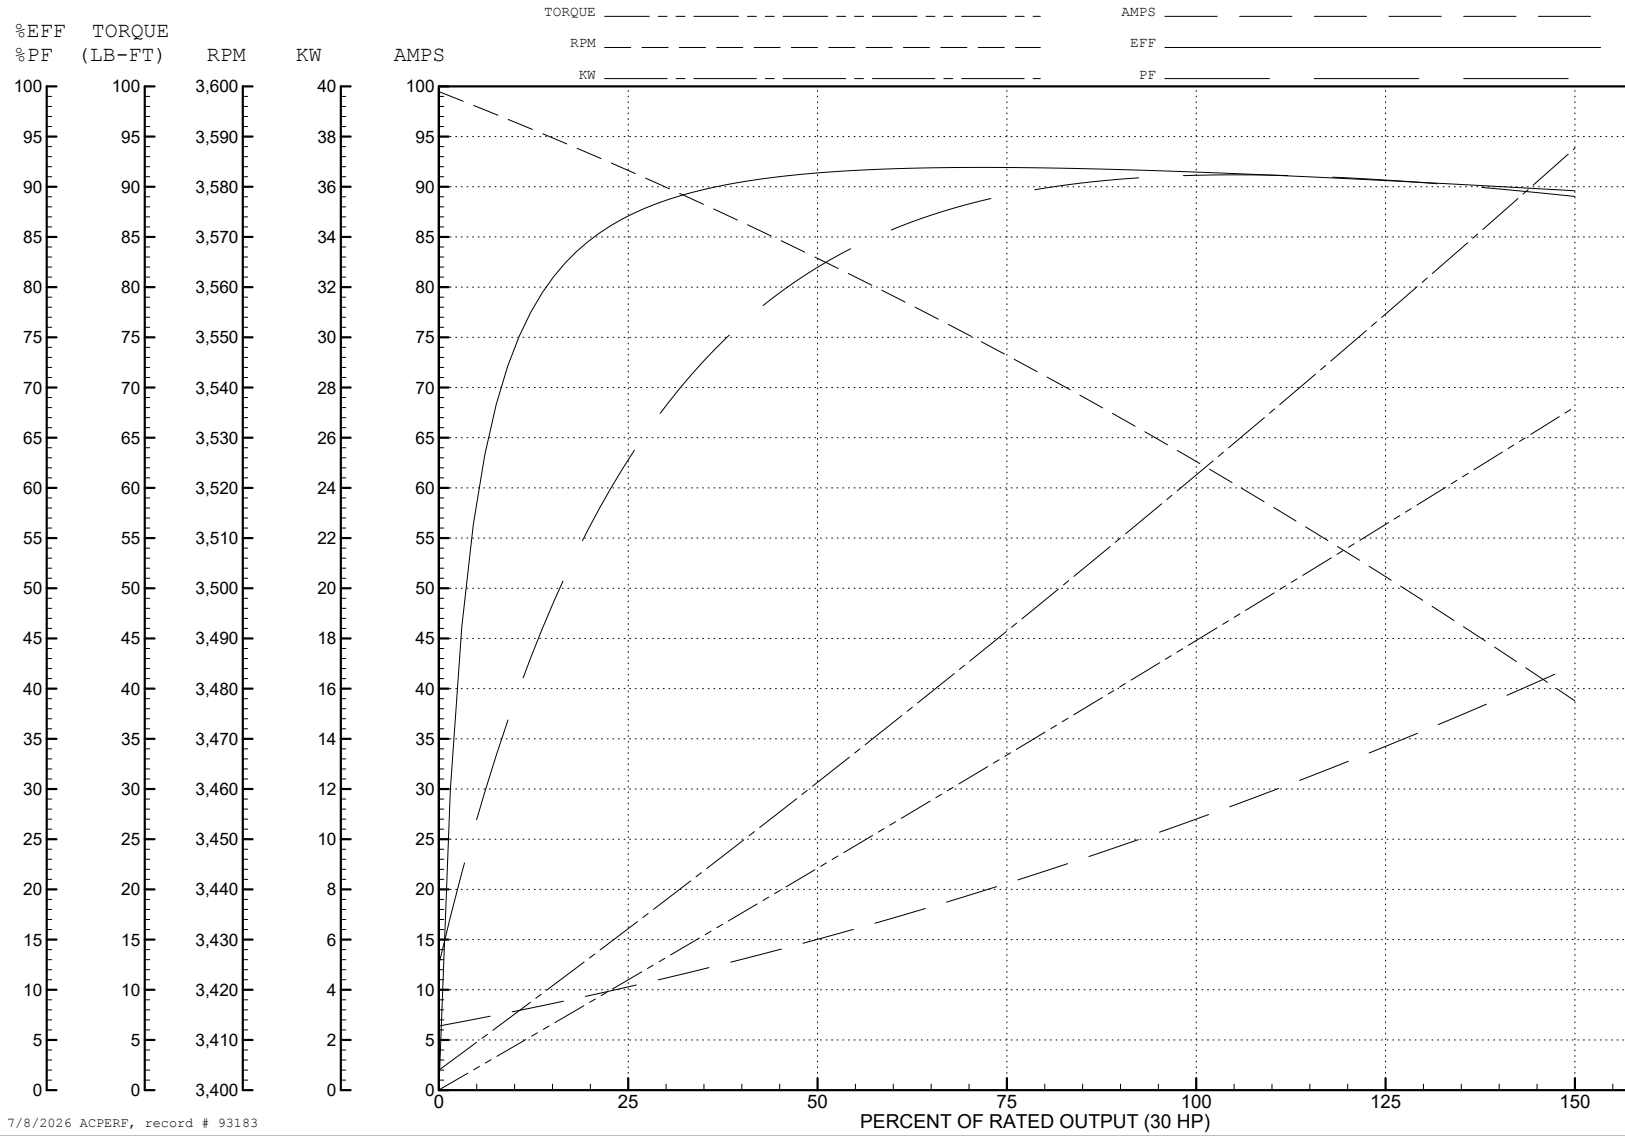

7/8/2026 ACPERF, record # 93183

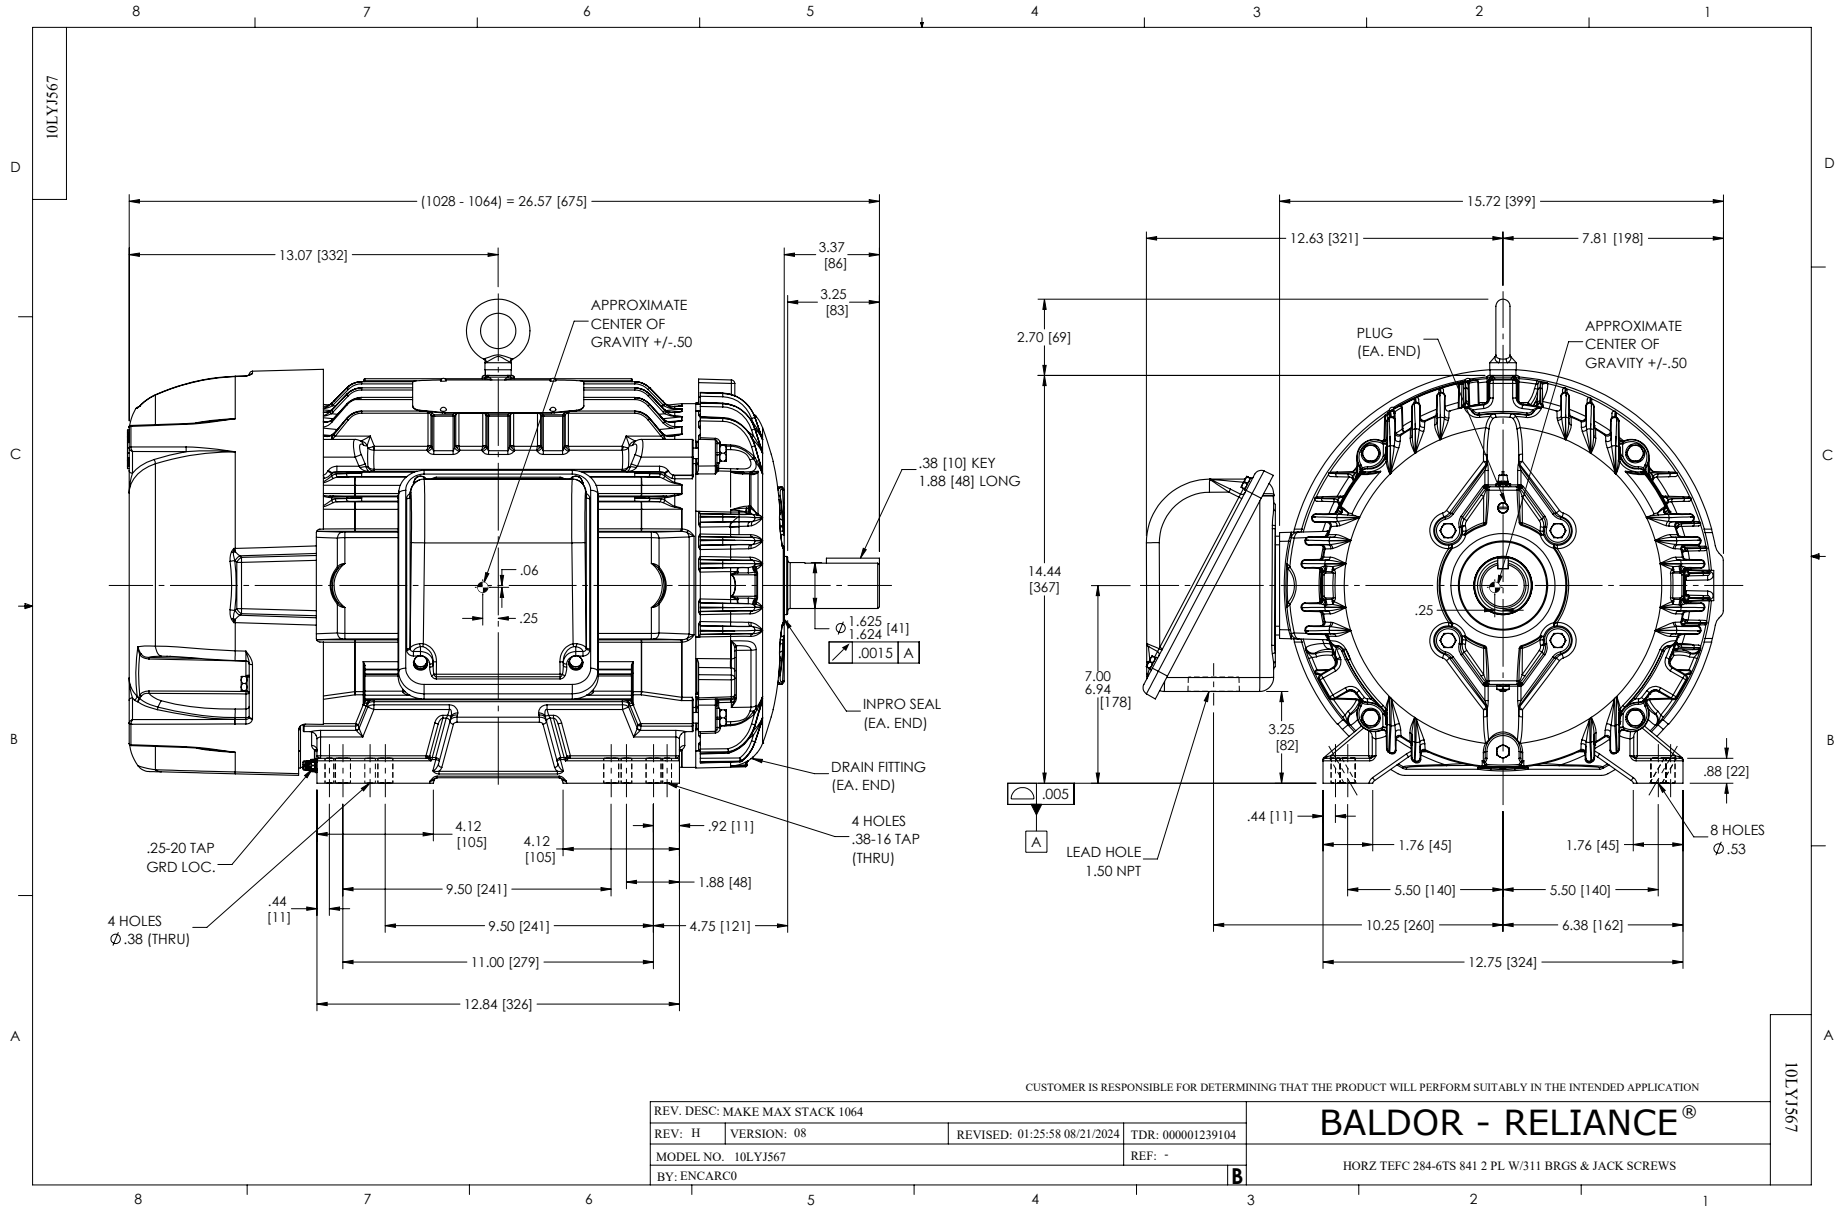

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: MAKE MAX STACK 1064		REVISED: 01:25:58 08/21/2024		TDR: 000001239104	
REV: H	VERSION: 08			REF: -	
MODEL NO. 10LYJ567					
BY: ENCARCO					

**BALDOR - RELIANCE®**

HORZ TEFC 284-GTS 841 2 PL W/311 BRGS & JACK SCREWS

CD0006



NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10:24:49 02/19/2019	BY: ENBRIRO
MTL: -		© □

**BALDOR - RELIANCE®**

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1