ABB BALDOR RELIANCE

# Customer information packet

## EJM3554

1.5HP, 1770RPM, 3PH, 60HZ, 56J, 3524M, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/25/2026 6:11:04 AM

## Specifications

| | |
|---|---|
| **Enclosure** | TEFC |
| **Frame** | 56J |
| **Frame Material** | Steel |
| **Frequency** | 60.00 Hz |
| **Haz Area Class and Group** | None |
| **Haz Area Division** | Not Applicable |
| **Motor Letter Type** | Three Phase |
| **Output @ Frequency** | 1.500 HP @ 60 HZ |
| **Phase** | 3 |
| **Synchronous Speed @ Frequency** | 1800 RPM @ 60 HZ |
| **Voltage @ Frequency** | 230.0 V @ 60 HZ |
| | 460.0 V @ 60 HZ |
| **Agency Approvals** | CSA EEV |
| | NEMA PREMIUM |
| | NEMA_PREMIUM |
| | UR |
| **Ambient Temperature** | 40 °C |
| **Auxiliary Box** | NO AUXILLARY BOX |
| **Auxiliary Box Lead Termination** | None |
| **Base Indicator** | No Mounting |
| **Bearing Grease Type** | Polyrex EM (-20F +300F) |
| **Blower** | None |
| **Current @ Voltage** | 4.640 A @ 208.0 V |
| | 4.600 A @ 230.0 V |
| | 2.300 A @ 460.0 V |
| **Design Code** | B |
| **Drip Cover** | No Drip Cover |
| **Duty Rating** | CONT |
| **Efficiency @ 100% Load** | 86.5 % |
| **Electrically Isolated Bearing** | Not Electrically Isolated |
| **Feedback Device** | NO FEEDBACK |
| **Front Shaft Indicator** | None |

## Part Detail

| | |
|---|---|
| **Revision** | D |
| **Type** | AC |
| **Mech. spec.** | 35F084 |
| **Base** | |
| **Status** | PRD/A |
| **Elec. spec.** | 35WGL955 |
| **Layout** | 35LYF084 |
| **Eff. date** | 01-05-2026 |
| **CD Diagram** | CD0005 |
| **Poles** | 04 |
| **Leads** | 9#18 Y |
| **Proprietary** | False |
| **Created date** | 03-11-2022 |

| | |
|---|---|
| **Heater Indicator** | No Heater |
| **High Voltage Full Load Amps** | 2.3 a |
| **Insulation Class** | F |
| **Inverter Code** | Inverter Ready |
| **KVA Code** | M |
| **Lifting Lugs** | No Lifting Lugs |
| **Locked Bearing Indicator** | Locked Bearing |
| **Motor Lead Quantity/Wire Size** | 9 @ 18 AWG |
| **Motor Lead Termination** | Flying Leads |
| **Motor Standards** | NEMA |
| **Motor Type** | 3524M |
| **Mounting Arrangement** | F1 |
| **Number of Poles** | 4 |
| **Overall Length** | 13.74 IN |
| **Power Factor** | 72 |
| **Product Family** | General Purpose |
| **Pulley End Bearing Type** | Ball |
| **Pulley Face Code** | C-Face |
| **Pulley Shaft Indicator** | Ext Thread |
| **Rodent Screen** | None |
| **Service Factor** | 1.15 |
| **Shaft Diameter** | 0.625 IN |
| **Shaft Ground Indicator** | No Shaft Grounding |
| **Shaft Rotation** | Reversible |
| **Shaft Slinger Indicator** | No Slinger |
| **Speed** | 1770 rpm |
| **Speed Code** | Single Speed |
| **Starting Method** | Direct on line |
| **Thermal Device - Bearing** | None |
| **Thermal Device - Winding** | None |
| **Vibration Sensor Indicator** | No Vibration Sensor |
| **Winding Thermal 1** | None |
| **Winding Thermal 2** | None |

**Nameplate**

| NP3441L | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **CAT.NO.** | EJM3554 | | | | | | | | | | |
| **SPEC.** | 35F084L955G1 | | | | | | | | | | |
| **HP** | 1.5 | | | | | | | | | | |
| **VOLTS** | 230/460 | | | | | | | | | | |
| **AMP** | 4.6/2.3 | | | | | | | | | | |
| **RPM** | 1770 | | | | | | | | | | |
| **FRAME** | 56J | **HZ** | 60 | | | **PH** | 3 | | | | |
| **SER.F.** | 1.15 | **CODE** | M | **DES** | B | **CL** | F | | | | |
| **NEMA-NOM-EFF** | 86.5 | **PF** | 72 | | | | | | | | |
| **RATING** | 40C AMB-CONT | | | | | | | | | | |
| **CC** | 010A | | | | | | | | | | |
| **DE** | 6205 | **ODE** | 6203 | | | | | | | | |
| **ENCL** | TEFC | **SN** | | | | | | | | | |
| **VPWM INVERTER READY** | | | | | | | | | | | |
| **CT6-60H(10:1)VT3-60H(20:1** | | | | | | | | | | | |
| | SFA 4.72/2.36 | | | | | | | | | | |

**AC Induction Motor Performance Data**
Record # 95387
Typical performance - not guaranteed values

| **Winding:** 35WGL955-R001 | **Type:** 3524M | **Enclosure:** TEFC |
|---|---|---|

| **Nameplate Data** | | | | **460 V, 60 Hz: High Voltage Connection** | |
|---|---|---|---|---|---|
| **Rated Output (HP)** | | | 1.5 | **Full Load Torque** | 4.48 LB-FT |
| **Volts** | | | 230/460 | **Start Configuration** | direct on line |
| **Full Load Amps** | | | 4.6/2.3 | **Breakdown Torque** | 18.8 LB-FT |
| **R.P.M.** | | | 1770 | **Pull-up Torque** | 9.6 LB-FT |
| **Hz** | 60 | **Phase** | 3 | **Locked-rotor Torque** | 12.6 LB-FT |
| **NEMA Design Code** | B | **KVA Code** | M | **Starting Current** | 19.7 A |
| **Service Factor (S.F.)** | | | 1.15 | **No-load Current** | 1.51 A |
| **NEMA Nom. Eff.** | 86.5 | **Power Factor** | 72 | **Line-line Res. @ 25ºC** | 11.8 Ω |
| **Rating - Duty** | | | 40C AMB-CONT | **Temp. Rise @ Rated Load** | 48°C |
| **S.F. Amps** | | | 5/2.5 | **Temp. Rise @ S.F. Load** | 57°C |
| | | | | **Locked-rotor Power Factor** | 58.4 |
| | | | | **Rotor inertia** | 0.173 lb-ft² |

**Load Characteristics 460 V, 60 Hz, 1.5 HP**

| **% of Rated Load** | **25** | **50** | **75** | **100** | **125** | **150** | **S.F.** |
|---|---|---|---|---|---|---|---|
| **Power Factor** | 31 | 49 | 63 | 72 | 78 | 81 | 76 |
| **Efficiency** | 75.1 | 83.5 | 86 | 86.5 | 85.8 | 84.8 | 86.1 |
| **Speed** | 1792 | 1785 | 1777 | 1769 | 1760 | 1750 | 1764 |
| **Line amperes** | 1.56 | 1.72 | 1.97 | 2.28 | 2.65 | 3.06 | 2.5 |

ABB Motors and Mechanical Inc.

WINDING # 35WGL955

1.5 HP 3 PH 60 HZ 1770 RPM 460 V 3524M

Typical performance - not guaranteed values.

TORQUES(LB-FT): PO=18.8 PU=9.6 LR=12.6 LRA=19.7

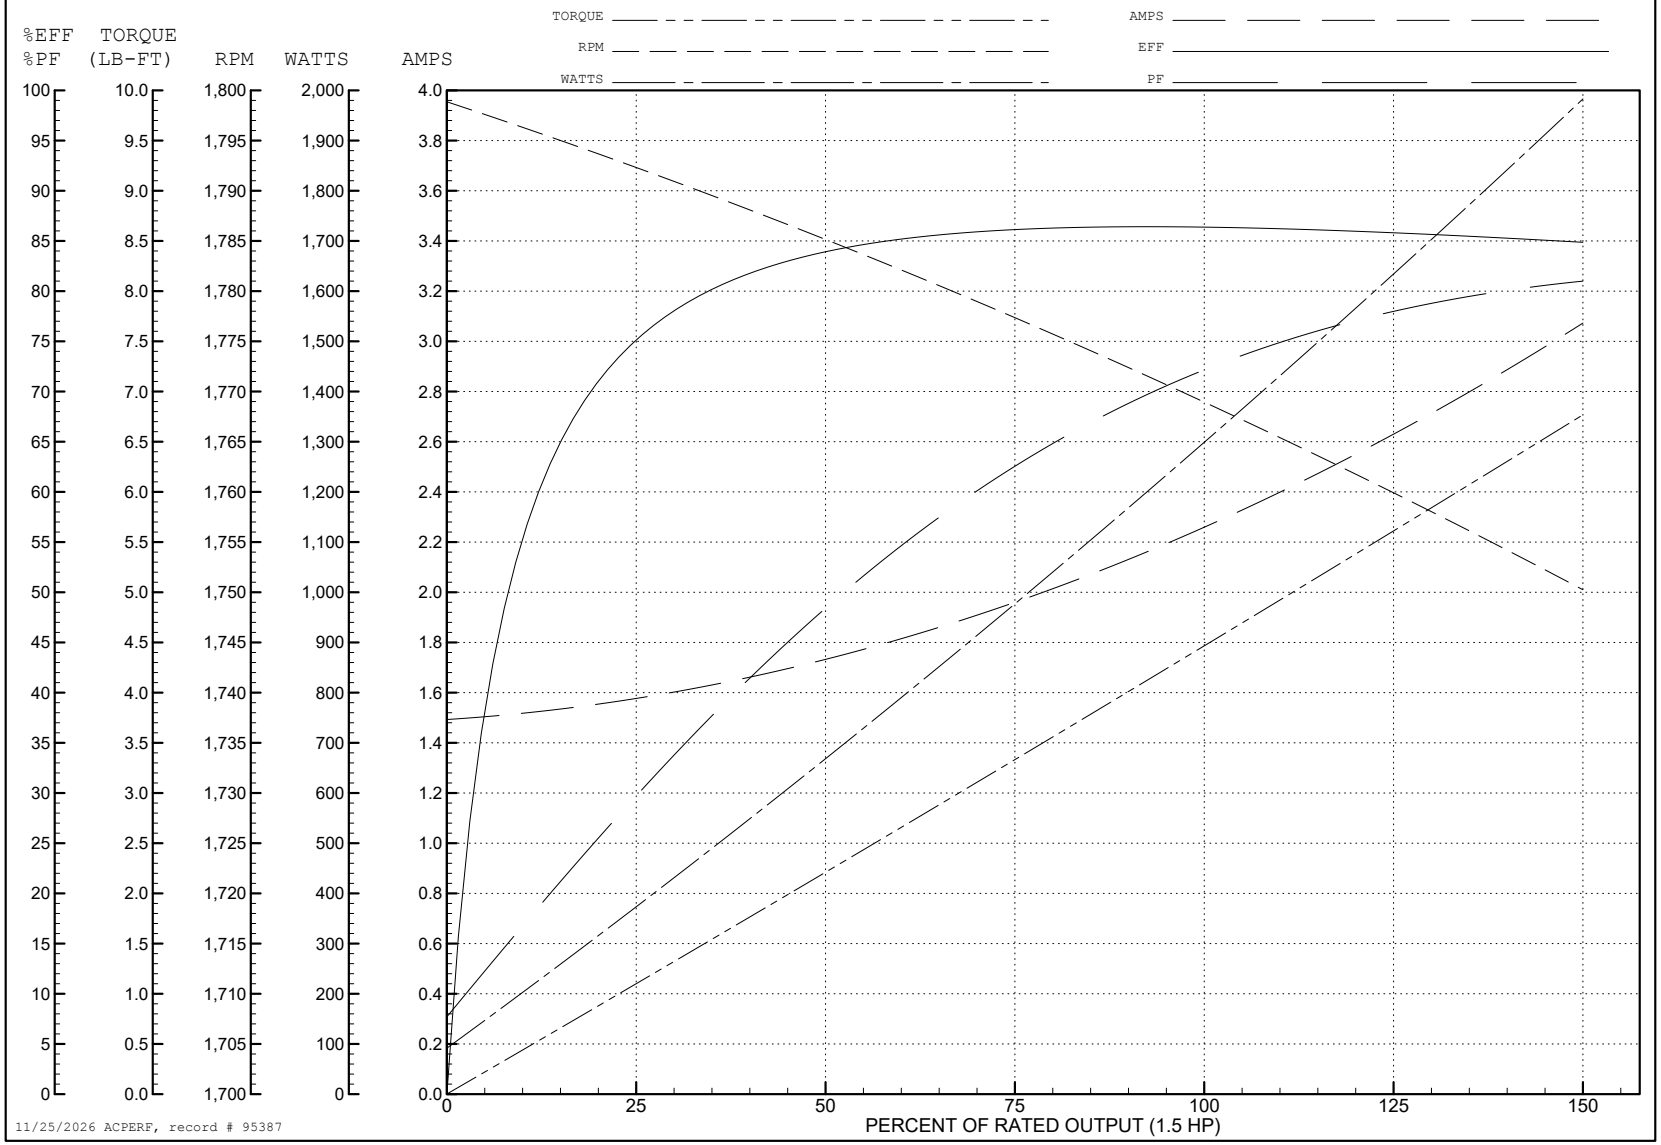


11/25/2026 ACPERF, record # 95387

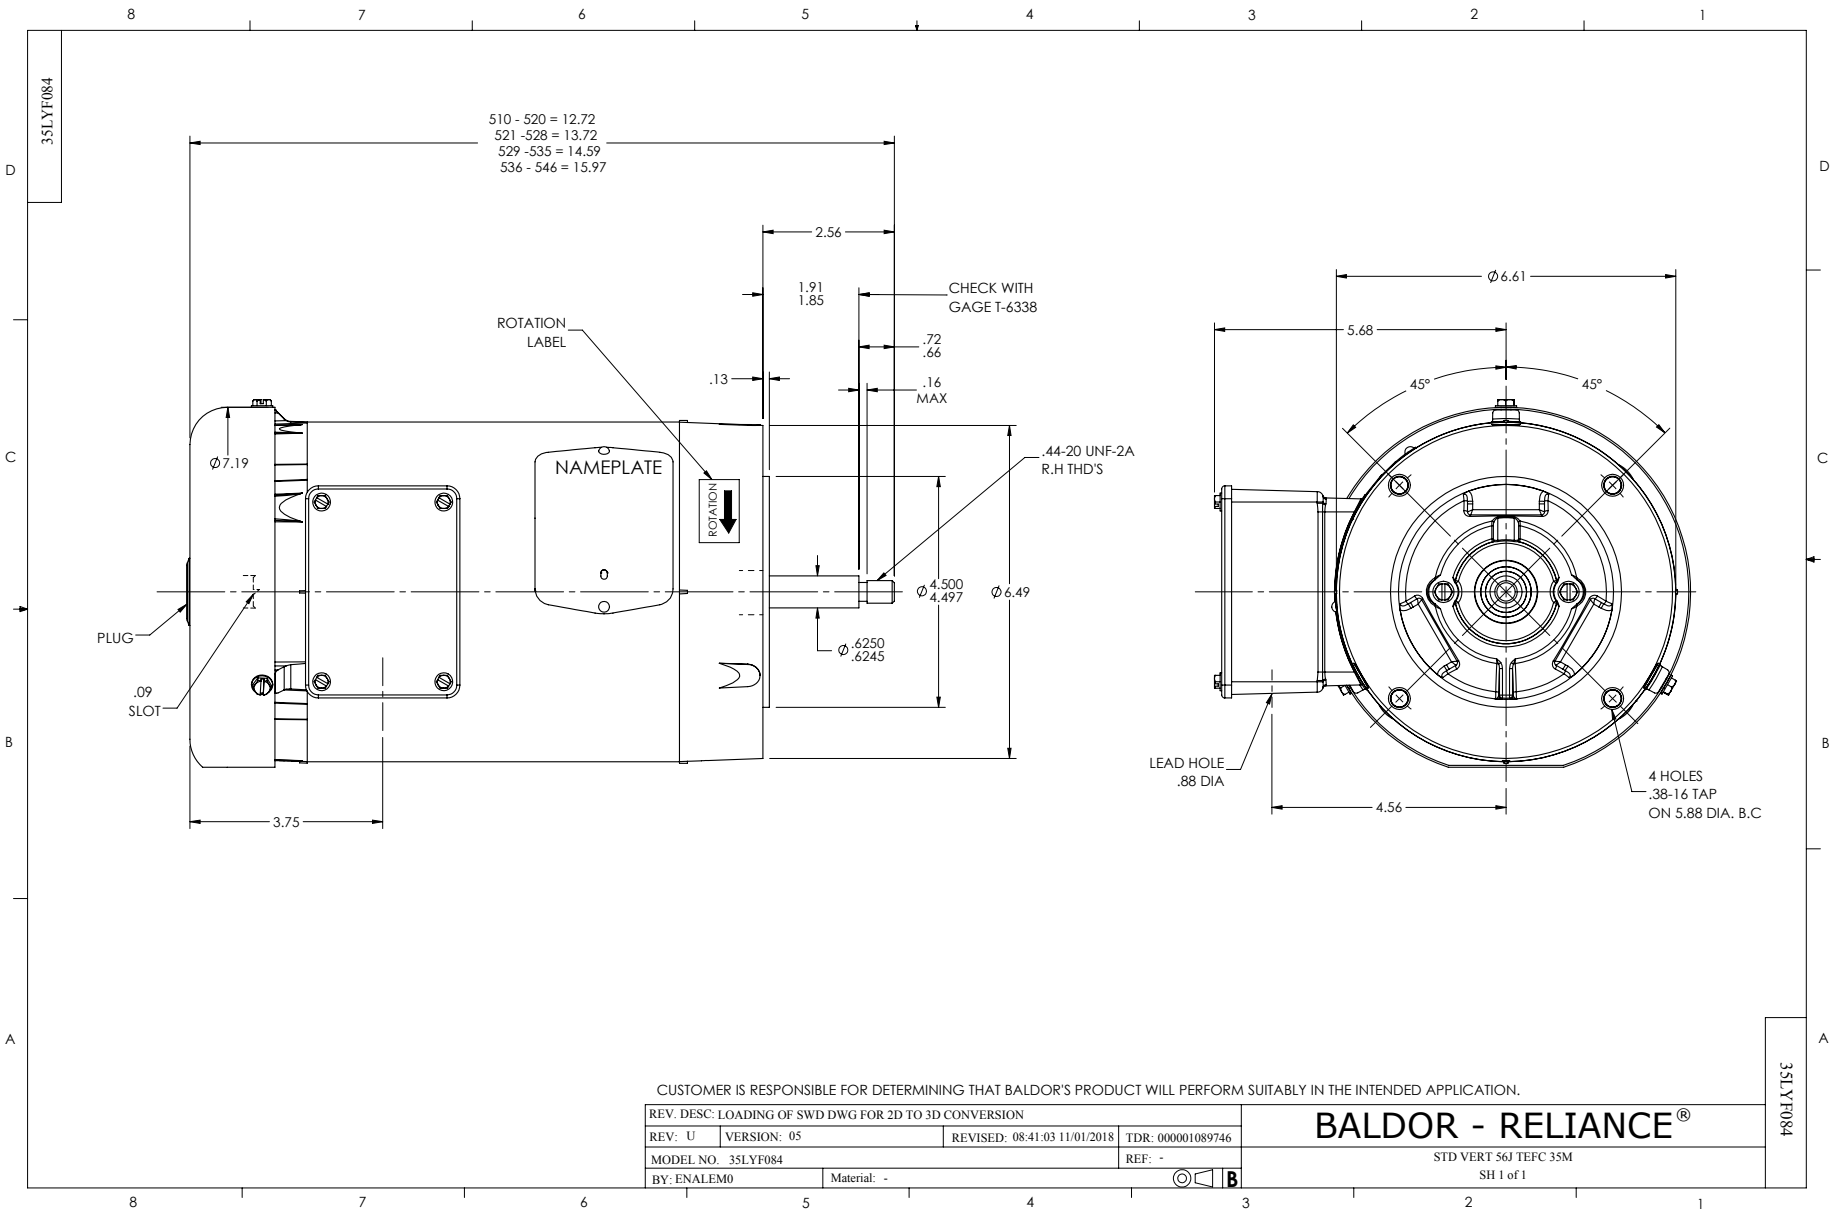
35LYF084
510 - 520 = 12.72
521 -528 = 13.72
529 -535 = 14.59
536 - 546 = 15.97
2.56
1.91
1.85
CHECK WITH
GAGE T-6338
ROTATION
LABEL
.72
.66
.13
.16
MAX
Ø7.19
NAMEPLATE
ROTATION
.44-20 UNF-2A
R.H THD'S
Ø4.500
4.497
Ø6.49
Ø.6250
.6245
PLUG
.09
SLOT
3.75
Ø6.61
5.68
45°
45°
LEAD HOLE
.88 DIA
4.56
4 HOLES
.38-16 TAP
ON 5.88 DIA. B.C
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.
REV. DESC: LOADING OF SWD DWG FOR 2D TO 3D CONVERSION
REV: U
VERSION: 05
REVISED: 08:41:03 11/01/2018
TDR: 000001089746
MODEL NO. 35LYF084
REF: -
BY: ENALEM0
Material: -
B
BALDOR - RELIANCE®
STD VERT 56J TEFC 35M
SH 1 of 1
35LYF084

CD0005

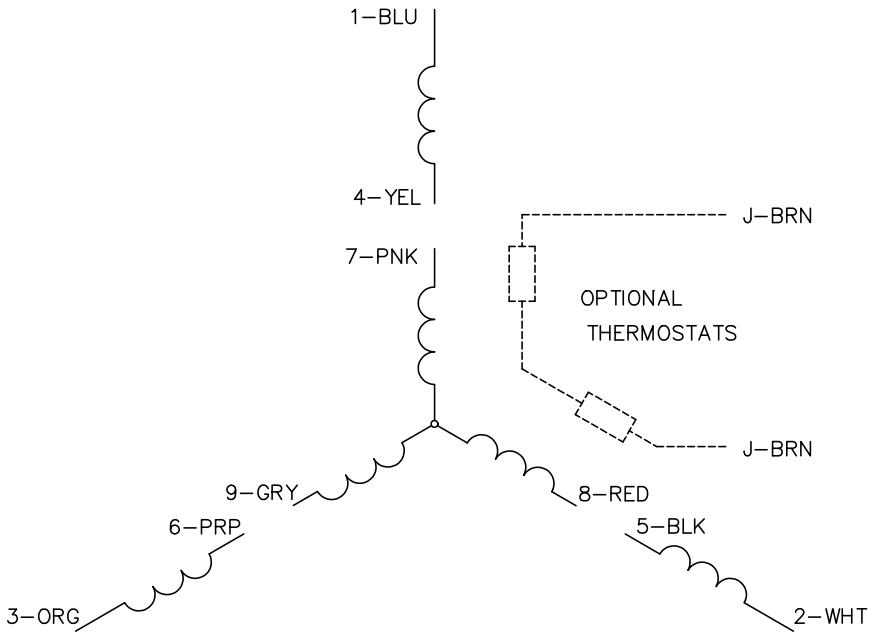


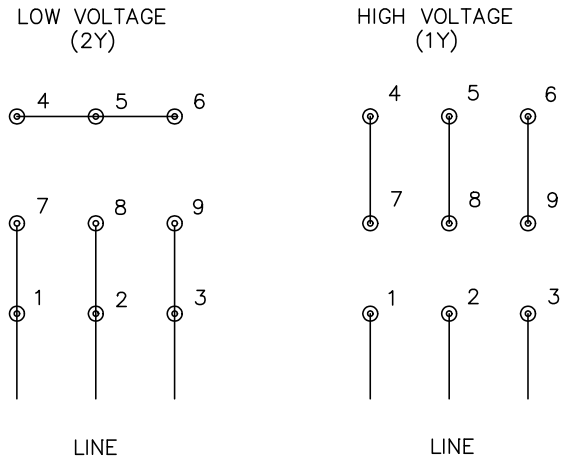


NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

| | | | |
|---|---|---|---|
| REV. DESC: REVISE TO SHOW OPTIONAL COLORS | | | BALDOR ELECTRIC Co. |
| REV. LTR: E | BY: JLP | REVISED: 01/19/99 10:15 | TDR: 0171435 |
| CD0005 | | FILE: AAA00005140 | MDL: – |
| | | MTL: – | 3PH, DV, 9 LEADS |