

BALDOR • RELIANCE

Customer information packet

MVM3542D

.56HP, 1725RPM, 3PH, 60HZ, D80D, 3420M, TEFC, B

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	D80D
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ 208.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.200 A @ 208.0 V 3.000 A @ 230.0 V 1.500 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	75.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Frame Prefix	D
Front Shaft Indicator	None

Part detail

Revision	D
Type	AC
Mech. spec.	34H339
Base	
Status	PRD/A
Elec. spec.	34WGR707
Layout	34LYH339
Eff. date	06-28-2024
CD Diagram	CD0005
Poles	04
Leads	9#18
Proprietary	False
Created date	01-29-2021

Heater Indicator	No Heater
High Voltage Full Load Amps	1.5 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	M
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	IEC
Motor Type	3420M
Mounting Arrangement	B5
Number of Poles	4
Overall Length	10.73 IN
Power Factor	64
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	D-Flange
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
Service Factor	1.25
Shaft Diameter	0.748 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1379L					
CAT.NO.	MVM3542D				
SPEC.	34H339R707G1				
IEC FRAME	D80D	K.W.	.56 TE		
VOLTS	208-230/460				
AMP	3.2-3/1.5				
RPM	1725	I.P.	54		
HZ	60	PH	3	CL	B
SER.F.	1.25	DES	B	CODE	M
NEMA-NOM-EFF	75.5	PF	64		
RATING	40C AMB-CONT				
CC					
DE	6205	ODE	6203		
SER. #					
	SFA 3.6-3.4/1.7				

AC Induction Motor Performance Data

Record # 85439

Preliminary Data Sheet

Winding: 34WGR707-R001		Type: 3420M	Enclosure: TEFC	
Nameplate Data			460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	0.75	Full Load Torque	2.27 LB-FT	
Volts	208-230/460	Start Configuration	direct on line	
Full Load Amps	3.2-3.0/1.5	Breakdown Torque	9.93 LB-FT	
R.P.M.	1725	Pull-up Torque	7.06 LB-FT	
Hz	60 Phase	3	Locked-rotor Torque	9.17 LB-FT
NEMA Design Code	B KVA Code	M	Starting Current	9.78 A
Service Factor (S.F.)	1.25	No-load Current	1.08 A	
NEMA Nom. Eff.	77 Power Factor	61	Line-line Res. @ 25°C	21.8 Ω
Rating - Duty	40C-AMB CONT	Temp. Rise @ Rated Load	69°C	
S.F. Amps	3.6-3.4/1.7	Temp. Rise @ S.F. Load	105°C	
		Locked-rotor Power Factor	76.9	
		Rotor inertia	0.0476 lb-ft ²	

Load Characteristics 460 V, 60 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	29	44	57	66	73	79	73
Efficiency	57.5	70.7	75.3	76.7	76.5	75.2	76.5
Speed	1780	1763	1745	1726	1723	1700	1723
Line amperes	1.09	1.15	1.26	1.4	1.58	1.79	1.58


ABB Motors and Mechanical Inc.

WINDING # 34WGR707


Typical performance - not guaranteed values.

0.75 HP 3 PH 60 HZ 1725 RPM 460 V 3420M

TORQUES (LB-FT): PO=9.93 PU=7.06 LR=9.17 LRA=9.78

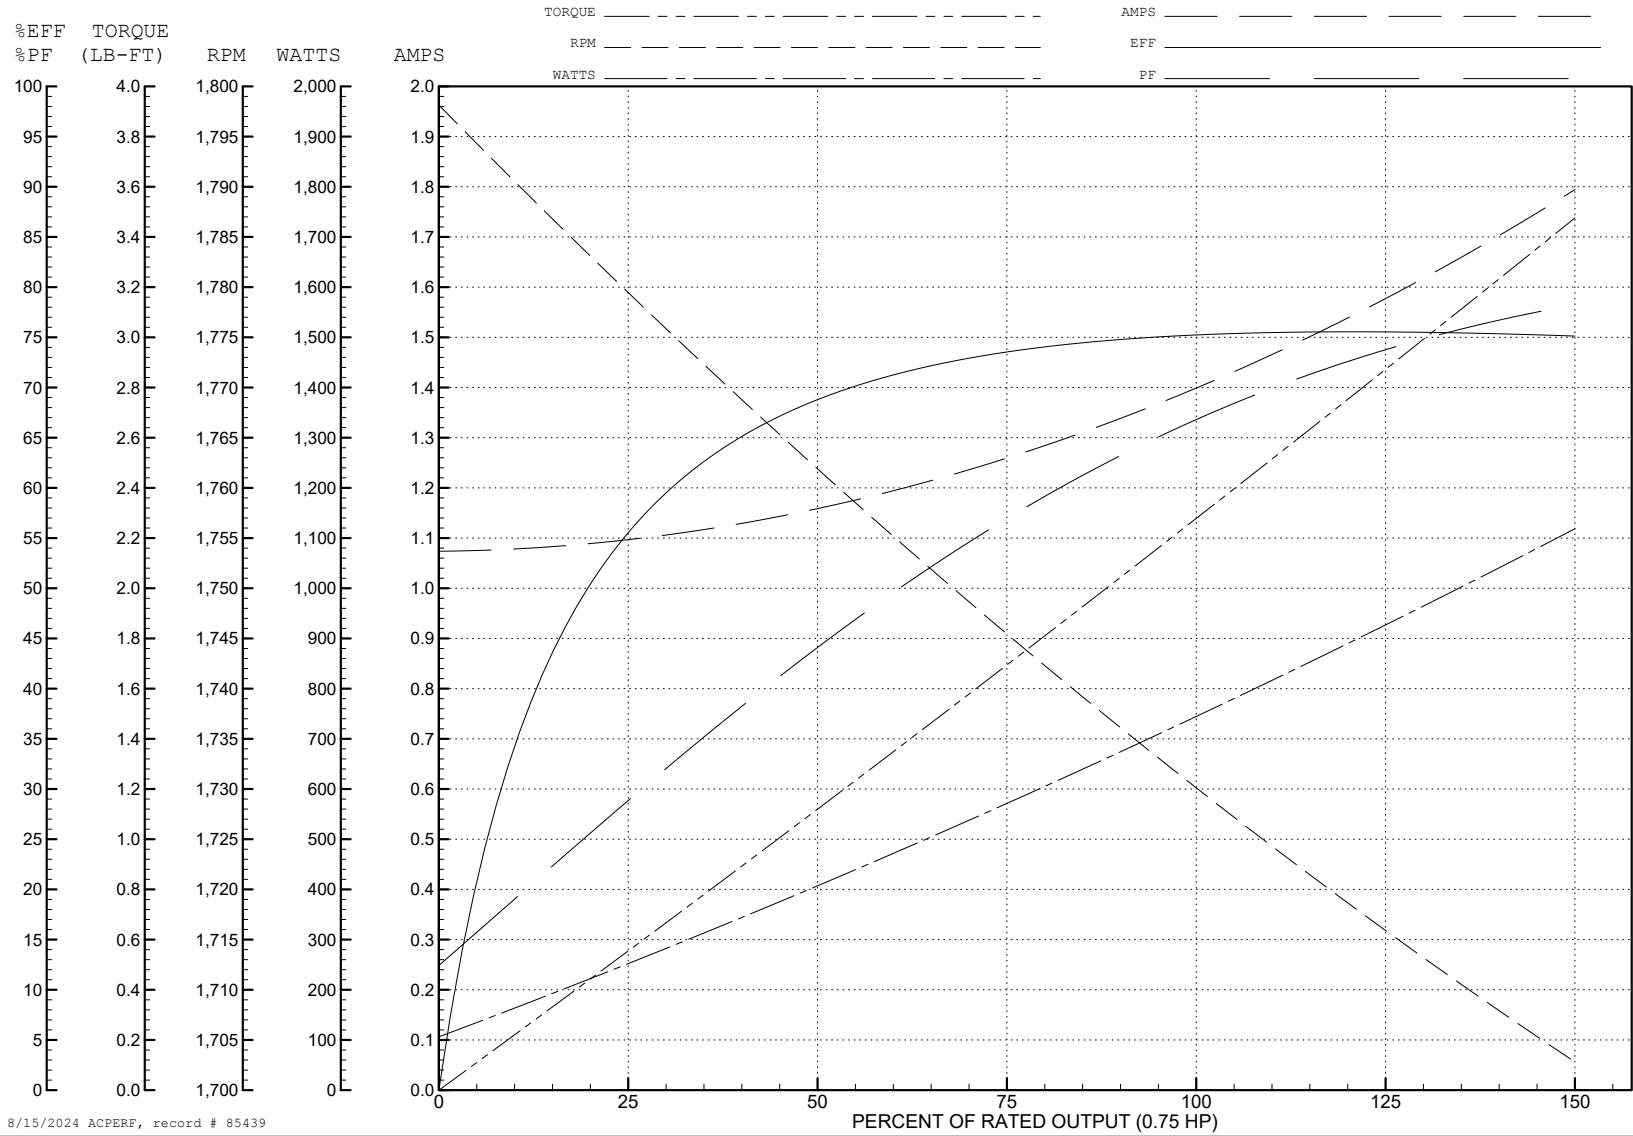

8/15/2024 ACPERF, record # 85439

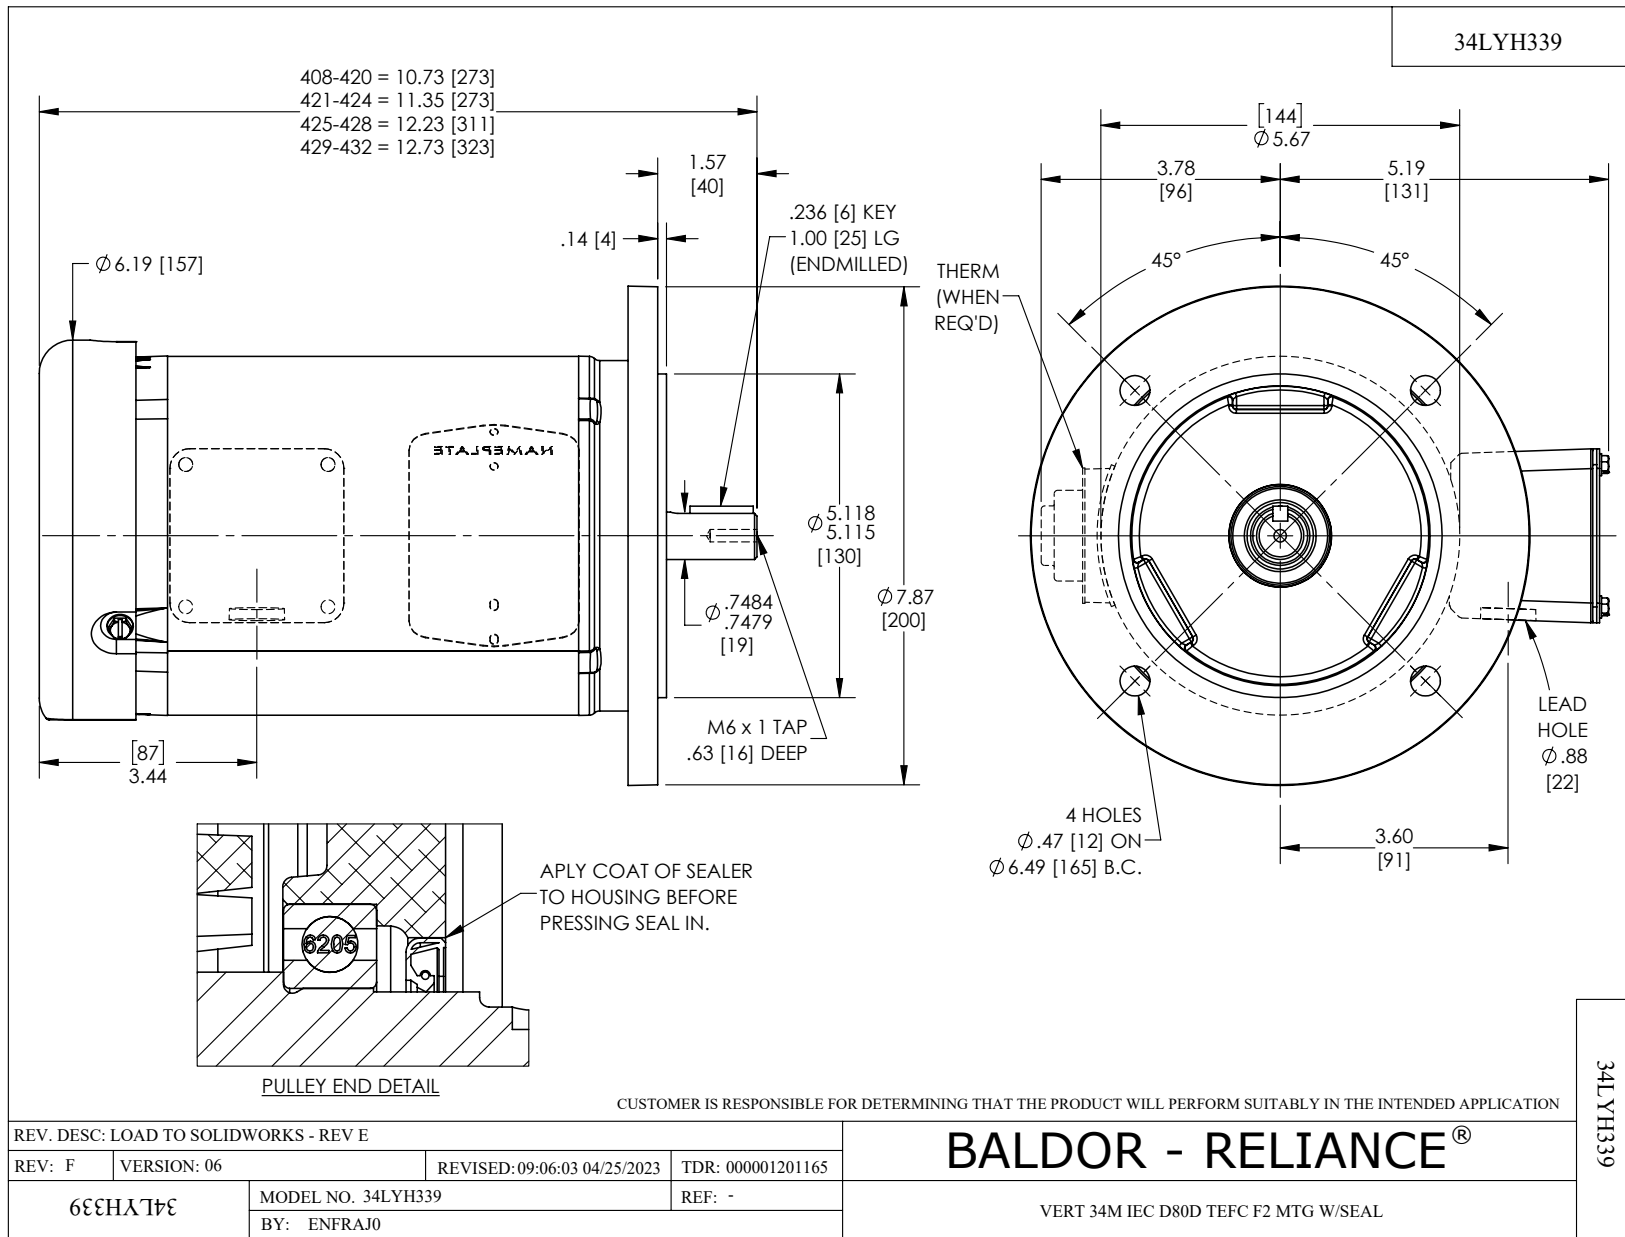

CD0005



LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS