

**BALDOR • RELIANCE**

---

# Customer information packet

## VFWDM3542

.75HP, 1765RPM, 3PH, 60HZ, 56C, 3514M, TEFC, F1

Class - None

Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.

9/12/2024 9:32:10 PM

## Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.140 A @ 460.0 V 2.280 A @ 230.0 V 2.400 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	82.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.1 a

## Part detail

Revision	F
Type	AC
Mech. spec.	35H815
Base	
Status	PRD/A
Elec. spec.	35WGG069
Layout	35LYH815
Eff. date	04-02-2024
CD Diagram	CD0005
Poles	04
Leads	9#18
Proprietary	False
Created date	01-10-2022

Insulation Class	F
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3514M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	12.24 IN
Power Factor	74
Product Family	Wash Down
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1765 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

**Nameplate**

<b>NP1496L</b>									
<b>CAT.NO.</b>	VFWDM3542								
<b>SPEC.</b>	35H815G069G1								
<b>HP</b>	.75								
<b>VOLTS</b>	230/460								
<b>AMP</b>	2.4/1.2								
<b>RPM</b>	1765								
<b>FRAME</b>	56C		<b>HZ</b>	60		<b>PH</b>	3		
<b>SER.F.</b>	1.25	<b>CODE</b>	K	<b>DES</b>	B	<b>CLASS</b>	F		
<b>NEMA-NOM-EFF</b>	82.5	<b>PF</b>	74						
<b>RATING</b>	40C AMB-CONT								
<b>CC</b>									
<b>DE</b>	6205		<b>ODE</b>	6203					
<b>ENCL</b>	TEFC	<b>SN</b>							
	SFA 2.68/1.34								

**AC Induction Motor Performance Data**

Record # 87322

Typical performance - not guaranteed values

Winding: 35WGG069-R009		Type: 3514M	Enclosure: TENV	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: High Voltage Connection</b>	
Rated Output (HP)	.75	Full Load Torque	2.24 LB-FT	
Volts	230/460	Start Configuration	direct on line	
Full Load Amps	2.42/2.42	Breakdown Torque	8 LB-FT	
R.P.M.	1765	Pull-up Torque	4.4 LB-FT	
Hz	60 Phase	3	Locked-rotor Torque	5.1 LB-FT
NEMA Design Code	B KVA Code	K	Starting Current	8.4 A
Service Factor (S.F.)	1.25	No-load Current	0.85 A	
NEMA Nom. Eff.	82.5 Power Factor	74	Line-line Res. @ 25°C	30.3 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	75°C	
S.F. Amps	2.8/1.4	Temp. Rise @ S.F. Load	94°C	
		Locked-rotor Power Factor	66.8	
		Rotor inertia	0.101 lb-ft <sup>2</sup>	

**Load Characteristics 460 V, 60 Hz, 0.75 HP**

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	30	48	61	70	77	81	80
Efficiency	68.4	79	82.2	82.9	82.4	81.2	82.8
Speed	1791	1783	1775	1766	1757	1746	1752
Line amperes	0.87	0.95	1.06	1.21	1.4	1.61	1.34


ABB Motors and Mechanical Inc.

WINDING # 35WGG069


0.75 HP 3 PH 60 HZ 1765 RPM 460 V 3514M

Typical performance - not guaranteed values.


TORQUES (LB-FT) : PO=8 PU=4.4 LR=5.1 LRA=8.4

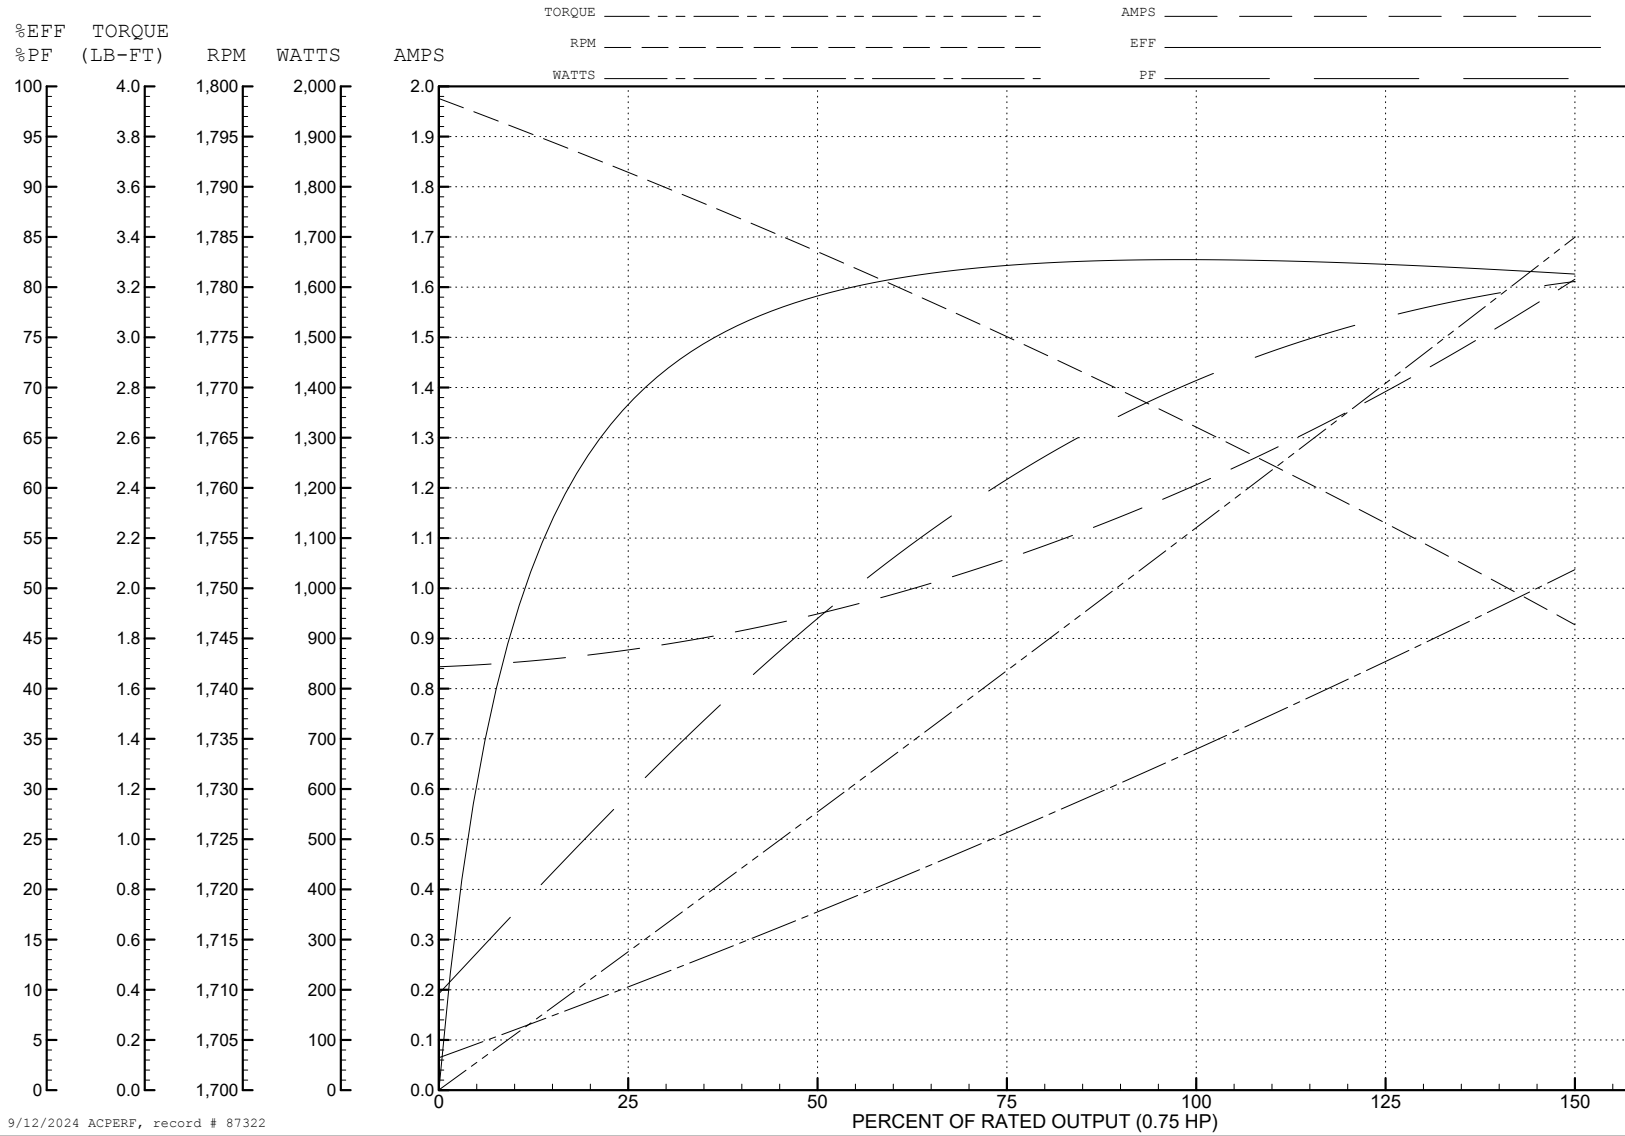


9/12/2024 ACPERF, record # 87322

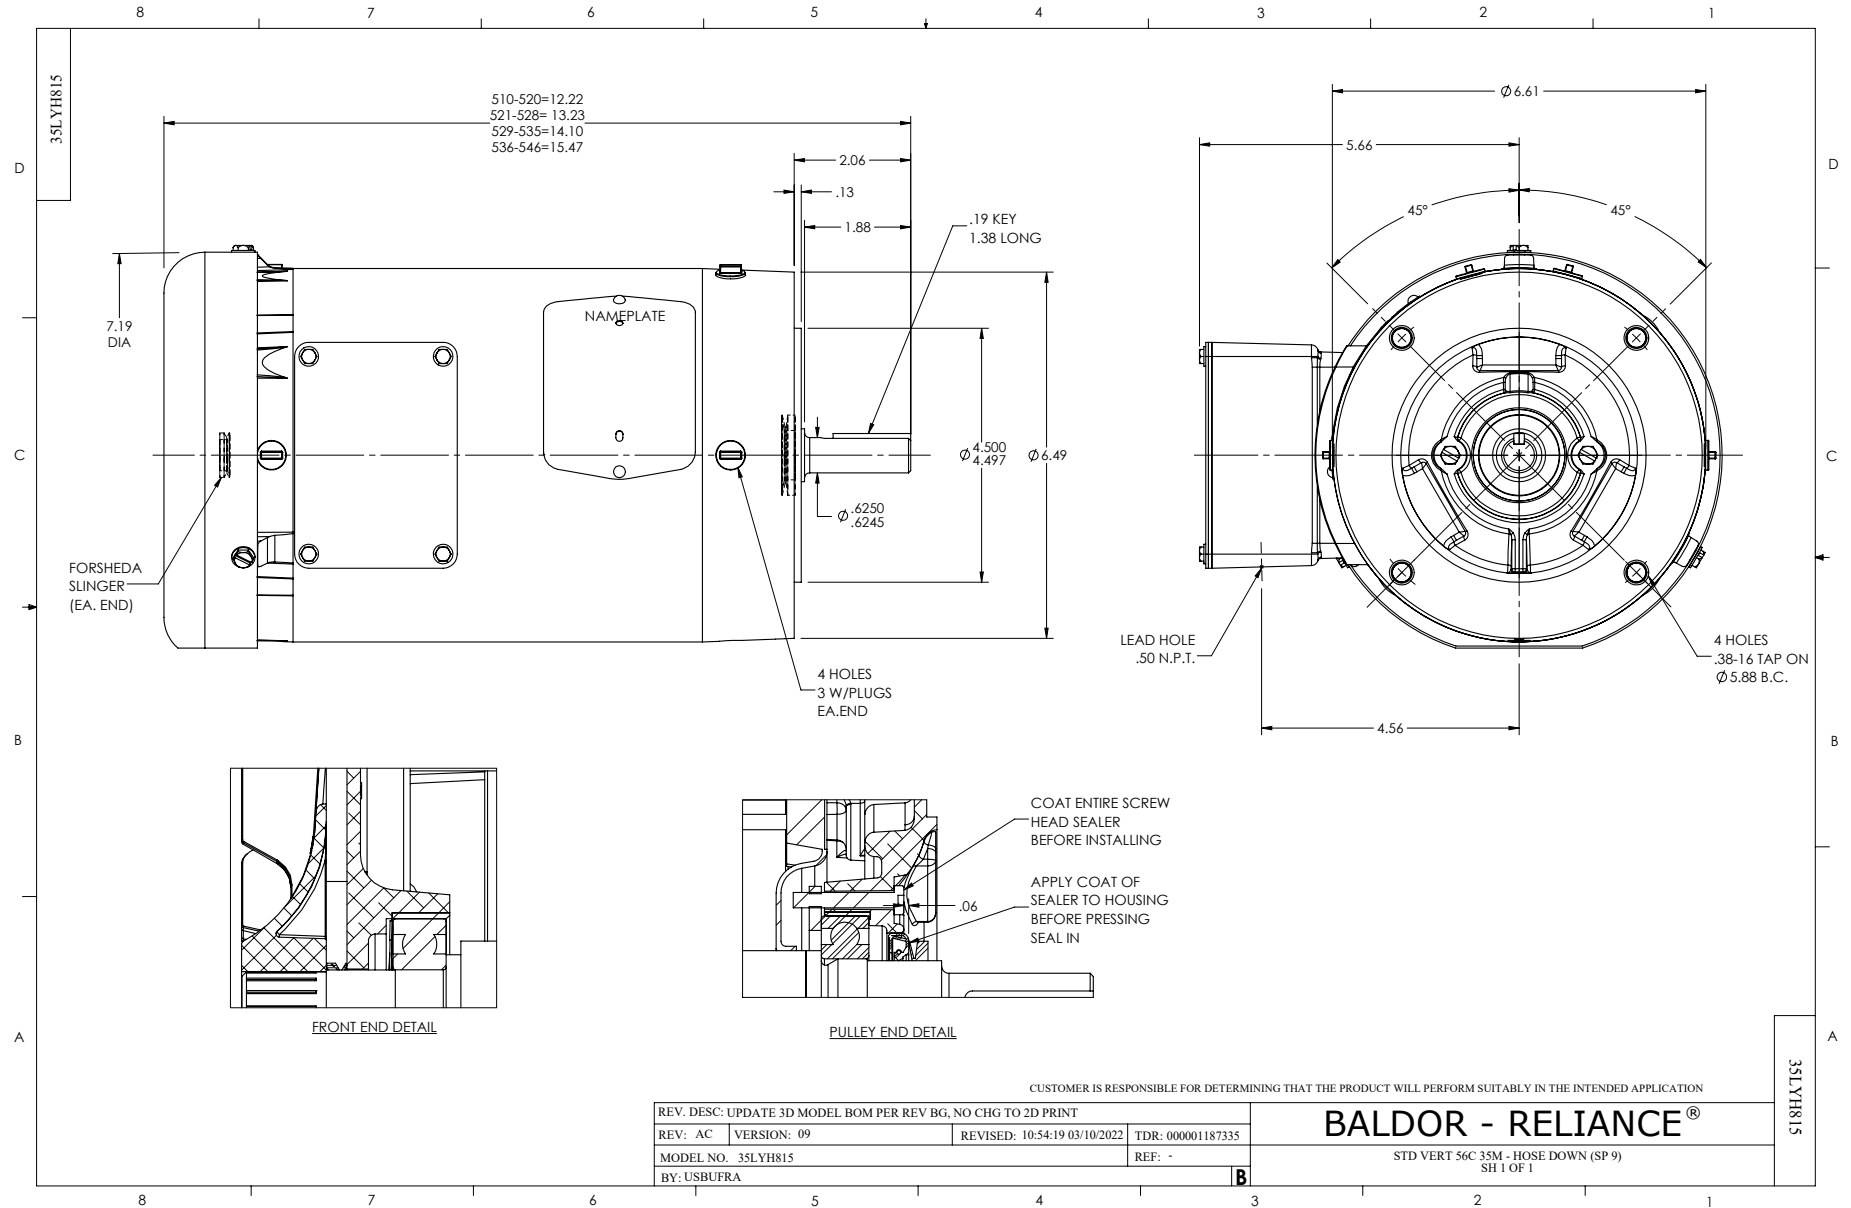

CD0005

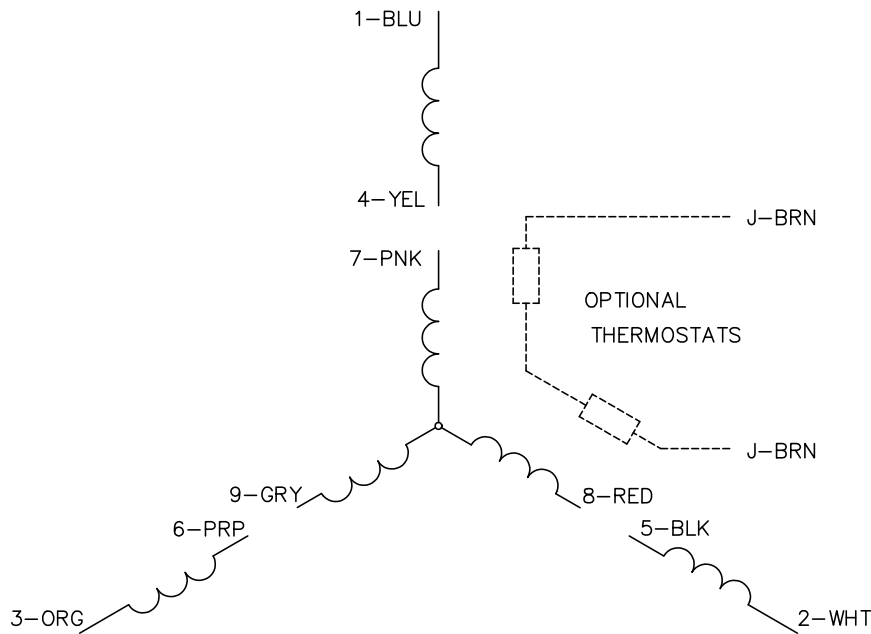


LOW VOLTAGE  
(2Y)

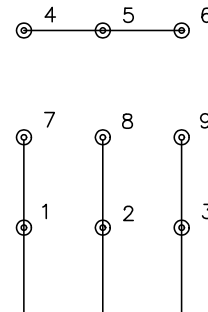

LINE

HIGH VOLTAGE  
(1Y)

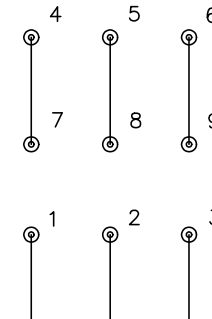

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

3PH, DV, 9 LEADS